

Cub Cadet®

Cub Cadet®

ENDURO SERIES™

FORCE SERIES

PRO SERIES

PREVIEW BROCHURE 2022



ELECTRIC
LITHIUM ION

XR5
ENDURO SERIES™



MTD Products Aktiengesellschaft
Industriestraße 23 • 66129 Saarbrücken • GERMANY
www.mtdproducts.eu

© 2021 MTD Products Aktiengesellschaft, Germany. All rights reserved. Cub Cadet and other trademarks are registered trademarks of MTD Products Group. For more information, simply go to our website: www.cubcadet.eu. We reserve the right to make changes to prices, technical features and changes due to printing and other errors. All prices including VAT, as long as stocks last. Prices valid until 31st October 2022 (As of September, 2021).

As of 10/2021



CHAMPIONS – INSPIRED BY AMERICAN INGENUITY

Is it the power? The endurance? Or simply the fact, that you are ready for every challenge? There are many things that make Cub Cadet a true „champion“ - and they all have one thing in common: a revolutionary garden tractor introduced to the US in the 1960s.

Back then a true milestone and to this day a historic benchmark with regards to our standards and values: we continuously strive to exceed the high demands of our customers. With a mix of innovative engineering and user-friendly design, we want to inspire professionals, semi-professionals and ambitious outdoor enthusiast alike by creating pure products that are built for maximum efficiency, ease-of-use and maximum comfort.

That is what makes us proud - and turns you into a true champion.

Cub Cadet

OUR HISTORY KEEPS US GOING

| | | | | | | | | | | | | |
|--|---|--|---|--|---|---|--|---|--|---|--|---|
| 1961 1 st Cub Cadet garden tractor hits the market | 1963 1 st shaft drive model | 1980 1 st super garden tractor | 1980 1 st twin cylinder engine | 1993 1 st steerable track drive snow thrower | 2006 Utility vehicles debut | 2009 Industry's tightest turning radius | 2011 50th anniversary celebration with innovation | 2014 Introduction of the innovative Boosted-Airflow-Technology | 2017 Launch of the PRO SERIES – Zero-Turns | 2018 Introduction of the XR ENDURO SERIES robotic mowers | 2020 Launch of the XZ5 Zero-Turn series | 2021 Introduction of the XR5 robotic mowers |
| | | | | | | | | | | | | |
| 1966 The world's 1 st garden tractor with hydrostatic transmission | 1972 "Cadet" lawn tractor debuts | 1985 Breaking new ground in cut quality | 1994 1 st lawn tractor with shaft drive | 2005 500 Series lawn tractor Made in Germany | 2007 Synchro-Steer® Technology debuts, an Industry first | 2010 Most advanced residential Zero-Turn | 2015 MySpeed – The innovative variable speed system | 2017 Introduction of the XT ENDURO SERIES lawn tractors | 2020 Launch of LR2 E-rider and XT2 E-lawn tractor | 2021 Introduction of the XZ7 Zero-Turn series | 2021 Launch of the Zero-Turn PRO Z9 | 2022 Completion of the full electric line-up with the introduction of the LM5 E 51 R electric lawn mower |
| | | | | | | | | | | | | |

NEW TO THE XR5 FAMILY: XR5 3000 & XR5 4000



Whatever the size or shape of your garden, we understand that it is your pride and joy. That's why the Cub Cadet XR5 has been designed to cut your lawn just like you would – with absolute precision.

From tackling uneven lawns to long grass and intricate edges, no lawn is too difficult for the XR5.

The two new models XR5 3000 and XR5 4000 are suitable for very large areas thanks to their double mowing deck that offers a staggering 42 cm cutting width.

Read more on page 6.

XZ6 ENDURO SERIES™



May we introduce the next evolution of ride-on zero-turn technology – the all-new XZ6. It combines all the great features of the XZ5 with the newest in steering wheel technology giving you the strength, performance and comfort you have learned to expect from a Cub Cadet rider.

A tubular steel frame that gives the mower the strength it needs and a fabricated mowing deck ensure unsurpassed mowing performance. The foot-operated deck lift and adjustable steering wheel column give you ultimate flexibility and full convenience for any task.

Read more on page 70.

NEW

OUR NEW ELECTRICAL RANGE. FULL POWER UNTIL THE FINAL TOUCH.

Endless opportunities, uncompromised capabilities, simplified ownership. From battery powered chainsaw to electrifying ride-on mowers, our brand new electric lineup is the perfect fit for your lawn and your lifestyle.

Read more on page 12.



THE XR5 IS DEVELOPED TO DELIVER QUALITY TIME AND TIME AGAIN, TO GIVE YOUR LAWN THAT PERFECT FLUFFY LOOK.



THE GARDENING ASSISTANT YOU'VE BEEN LOOKING FOR

The XR5 has been developed to cut your lawn with such precision that your neighbour will think you have cut your lawn yourself. The high quality steel blades cut your grass for maximum health and thickness so you get a luscious lawn with the time back to actually enjoy it.



1. BEAUTIFULLY FINISHED EDGES

Cutting beyond the edge of the wheel, the XR5 gives you a finish to be proud of, even on uneven surfaces.



2. HANDLES THICK GRASS AND UNEVEN TERRAIN

The reliable XR5 will never let you down. It doesn't get stuck and handles uneven terrain reliably.



3. EASY TO USE

From our easy to use interface and other features, including the charging station, Cub Cadet ensures that the XR5 is quick and easy to install.



4. EASY TO MAINTAIN


XR5 has been developed to self-clean, giving you more time in the garden. For complete peace of mind, you should arrange an annual maintenance service with your dealer.

COMPLETE CONTROL VIA SMARTPHONE

The App allows the robotic mowers in the XR ENDURO SERIES to be controlled and programmed securely and conveniently using your smartphone. Our recent BLE 5.0 upgrade now allows for faster data transfer of up to 2 MBps and greater outdoor range. Simply download the app, install it on your phone and get mowing.



DISCOVER THE NEW XR5!

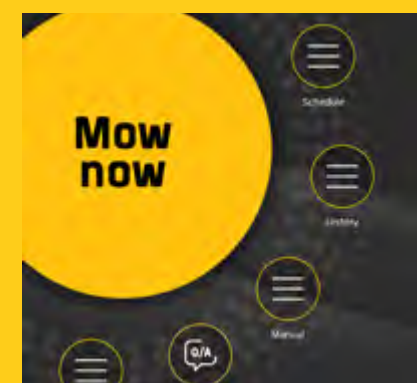


REMOTE CONTROL

XR mowers can be manually controlled, even beyond the perimeter wire.



UPDATES

- Mowing progress
- Battery charge
- Mowing times

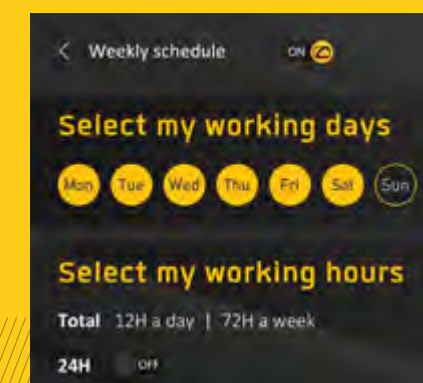

PROGRAM SETTINGS

- Mowing
- To charging station
- Deactivate automatic start
- Set mowing times

XR5 MOWING IN A CLASS OF THEIR OWN

From floating deck and superior slope handling to beyond-the-wheel edge cutting mode, the Cub Cadet XR5 range is packed with features that give your lawn a flawless finish. Latest addition to the 2022 line-up, are the new double mowing deck models for lawn areas of up to 4000 square meters. As for its smaller siblings, these new XR5s are also eligible for 1 free year additional warranty – protection against theft and vandalism included.

XR5
ENDURO SERIES™



DOUBLE
DECK WITH
42 CM
CUTTING
WIDTH

XR5 1000

| | |
|--------------------|-----------------|
| Cutting width: | 21 cm |
| Cutting height: | 20-100 mm |
| Lawn area (rec.): | Up to 1.000 m²* |
| Mowing time: | 40-50 min |
| Engine: | DC Brushless |
| Power consumption: | 4,0 kWh/month |
| Model no.: | 22AKFEFA603 |
| Price: | - |

XR5 2000

| | |
|--------------------|-----------------|
| Cutting width: | 21 cm |
| Cutting height: | 20-100 mm |
| Lawn area (rec.): | Up to 2.000 m²* |
| Mowing time: | 80-90 min |
| Engine: | DC Brushless |
| Power consumption: | 7,3 kWh/month |
| Model no.: | 22AKHEFA603 |
| Price: | - |

NEW



XR5 3000

| | |
|--------------------|-----------------|
| Cutting width: | 42 cm |
| Cutting height: | 20-100 mm |
| Lawn area (rec.): | Up to 3.000 m²* |
| Mowing time: | 80-90 min |
| Engine: | DC Brushless |
| Power consumption: | 8,7 kWh/month |
| Model no.: | 22AKJEFA603 |
| Price: | - |

XR5 4000

| | |
|--------------------|-----------------|
| Cutting width: | 42 cm |
| Cutting height: | 20-100 mm |
| Lawn area (rec.): | Up to 4.000 m²* |
| Mowing time: | 110-120 min |
| Engine: | DC Brushless |
| Power consumption: | 11,5 kWh/month |
| Model no.: | 22AKLEFA603 |
| Price: | - |

*Max. mowing area under ideal mowing conditions: flat level lawn, simple rectangular shape, no obstacles, no additional zones, and modest lawn growing pace.



- FLOATING DECK**
A floating deck cuts uneven lawns flawlessly on any terrain, guaranteeing an excellent cut every time for even the most unusual landscapes.




- SLOPE HANDLING**
45% slope handling performance makes light work of the most challenging lawn setups.



- 100 MM CUTTING HEIGHT**
Tall, thick grass is not a problem with a 100 mm maximum cutting height.




- PATENTED ALL TERRAIN WHEELS**
Whatever your lawn surface looks like, the patented high traction, all-terrain wheels can navigate it smoothly and efficiently.



- LOW NOISE**
No more waiting for a sunny afternoon to tackle the lawn. Thanks to its drive motor, the XR5 is so quiet it could mow at night.



- SELF-CLEANING**
Self cleaning deck and wheels, making maintenance a breeze.



- 4.3" TOUCHSCREEN**
Set your mower to the exact setting you want with an easy-to-use 4.3" LCD touchscreen.



- EDGE MODE TECHNOLOGY**
The XR5's unique edging ability mows beyond the wheel to deliver a precise finish every time.



- PATENTED CUTTING SYSTEM**
Thanks to its patented cutting system you can have a great cut.



- 360 DEGREE SENSOR**
The XR5's omni-directional obstruction sensor ensures that it can navigate its way around any obstacle (please still make sure that there are no children or pets on the lawn while mowing).















** Manufacturer's guarantee from MTD Products AG, limited to supplementary performance and according to the guarantee conditions (available at www.cubcadet.eu).

TABLE OF PRODUCTS

| | XR5 1000 | XR5 2000 |
|----------------------------|---|---|
| BATTERY | | |
| Engine | DC Brushless | DC Brushless |
| Battery | 18,15V Li-Ion | 18,15V Li-Ion |
| Mowing time | 40-50 min | 80-90 min |
| Charging time | 60-120 min | 60-120 min |
| Power consumption | 4,0 kWh/month | 7,3 kWh/month |
| CUTTING SYSTEM | | |
| Lawn area (rec.) | Up to 1.000 m² * | Up to 2.000 m² * |
| Cutting width | 21 cm | 21 cm |
| Cutting height (min.-max.) | 20-100 mm | 20-100 mm |
| Blades | 4 cutting blades | 4 cutting blades |
| Mowing zones | 1 main zone, 4 sub zones, separate zones | 1 main zone, 4 sub zones, separate zones |
| Area coverage per hour | 65 m²/h | 65 m²/h |
| Maximum inclination | 24° / 45 % | 24° / 45 % |
| EQUIPMENT | | |
| Base station | Included | Included |
| RoboHome | Optional (122-085-603) | Optional (122-085-603) |
| Display | 4,3" HD coloured touch | 4,3" HD coloured touch |
| Bluetooth® | 5.0 | 5.0 |
| App | Standard | Standard |
| Anti-theft | Standard | Standard |
| Bump-Sensor | 360° detection | 360° detection |
| Tilt-Sensor | Standard | Standard |
| Lift-Sensor | Standard | Standard |
| Edge mode | Standard | Standard |
| GSM modul | Standard | Standard |
| Wheels | HIGH TRACTION all terrain wheels | HIGH TRACTION all terrain wheels |
| DIMENSIONS | | |
| LpA/LwA/LwAg (dB) | 50/61/64 | 50/61/64 |
| Dimensions (L/W/H) | 67 cm / 51 cm / 28 | 67 cm / 51 cm / 28 |
| Net weight | 23,0 kg (incl. packaging) kg | 24,5 kg (incl. packaging) kg |
| PRICE | | |
| Model number | 22AKFEFA603 | 22AKHEFA603 |
| EAN |  4 008423 917215 |  4 008423 917246 |
| Price | - | - |

| | <div>NEW</div> XR5 3000 | <div>NEW</div> XR5 4000 |
|----------------------------|---|---|
| BATTERY | | |
| Engine | DC Brushless | DC Brushless |
| Battery | 18,15V Li-Ion | 18,15V Li-Ion |
| Mowing time | 80-90 min | 110-120 min |
| Charging time | 60-80 min | 90-110 min |
| Power consumption | 8,7 kWh/month | 11,5 kWh/month |
| CUTTING SYSTEM | | |
| Lawn area (rec.) | Up to 3.000 m² * | Up to 4.000 m² * |
| Cutting width | 42 cm | 42 cm |
| Cutting height (min.-max.) | 20-100 mm | 20-100 mm |
| Blades | 2 x 4 blades | 2 x 4 blades |
| Mowing zones | 1 main zone, 4 sub zones, separate zones | 1 main zone, 4 sub zones, separate zones |
| Area coverage per hour | 135 m²/h | 135 m²/h |
| Maximum inclination | 24° / 45 % | 24° / 45 % |
| EQUIPMENT | | |
| Base station | Included | Included |
| RoboHome | Optional (122-085-603) | Optional (122-085-603) |
| Display | 4,3" HD coloured touch | 4,3" HD coloured touch |
| Bluetooth® | 5.0 | 5.0 |
| App | Standard | Standard |
| Anti-theft | Standard | Standard |
| Bump-Sensor | 360° detection | 360° detection |
| Tilt-Sensor | Standard | Standard |
| Lift-Sensor | Standard | Standard |
| Edge mode | Standard | Standard |
| GSM modul | Standard | Standard |
| Wheels | HIGH TRACTION all terrain wheels | HIGH TRACTION all terrain wheels |
| DIMENSIONS | | |
| LpA/LwA/LwAg (dB) | 50/61/64 | 50/61/64 |
| Dimensions (L/W/H) | 67 cm / 53 cm / 28 cm | 67 cm / 53 cm / 28 cm |
| Net weight | n.a. kg | n.a. kg |
| PRICE | | |
| Model number | 22AKJEFA603 | 22AKLEFA603 |
| EAN |  4 008423 921250 |  4 008423 921267 |
| Price | - | - |

ROBOTIC MOWER ACCESSORIES

| | | | |
|---|--|--|-----------------------------------|
| PERIMETER SETTING | | | |
|  | Perimeter wire (650 metres on spool) |  | Mod. no.: MRK0067B Price: - |
|  | Installation Kit small (for max. 400 m²) 100 m wire, 150 pegs |  | Mod. no.: 122-001-603 Price: - |
|  | Installation Kit medium (for max. 1.200 m²) 150 m wire, 200 pegs |  | Mod. no.: 122-002-603 Price: - |
|  | Installation Kit large (for max. 2.500 m²) 250 m wire, 350 pegs |  | Mod. no.: 122-003-603 Price: - |
| REPLACEMENT BLADES | | | |
|  | Blade kit XR5 models |  | Mod. no.: 122-105-603 Price: - |
| COVERS | | | |
|  | RoboHome for XR5 models |  | Mod. no.: 122-085-603 Price: - |



MORE POWER FOR YOUR WORLD

Lawn mower, string trimmer, hedge trimmer, chainsaw or leaf blower – each piece runs on an interchangeable lithium-ion battery so you can conveniently mix and match for enough power to finish the task at hand. They meet the rigorous standards for performance and durability you’ve come to expect from Cub Cadet equipment. Making it convenient to get all of your jobs done easier, with zero emissions and quieter than ever.



UNCOMPROMISING PERFORMANCE

Your lawn care depends on strong equipment, and our electric lineup won’t let you down. Each piece is engineered with the same uncompromising commitment to design, comfort and performance we demand from every product.



LESS MAINTENANCE



LONG RUNTIME



LOW CHARGE TIME



LOW NOISE



CUTS GRASS JUST LIKE GAS.

Think electric equipment compromises power? Think again. Our lithium-ion-powered electric lineup is proven to deliver the same results as our industry-leading gas models, resulting in the same premium cut quality you expect from Cub Cadet.



FULL POWER UNTIL THE FINAL TOUCH.

Unlike the lead-acid batteries in many riders, our lithium-ion battery pack eliminates power fade for the duration of its charge, while the efficient brushless motor ensures optimized power throughout.



100 % ELECTRIC. 0 % COMPROMISE.

Our electric lineup meets the same rigorous standards for performance, power and durability you’ll find in any Cub Cadet equipment.

LR2
FORCE SERIES

MOWING WITH POWER WHILE RESPECTING THE ENVIRONMENT

With the MINI-RIDER LR2 ES76, the MINI-RIDER segment is literally becoming new drive. This brand new model uses strong electric motors and is powered by a 56V Li-ION battery. Its large cutting width of 76 cm combined with 60 minutes of running time make the cutting of bigger lawns like a walk in the park. The MINI-RIDER LR2 ES76 comes with a 3 year warranty on both the mower and the battery.



Learn more

MOWING
TIME
60 MIN*
4 HOURS
CHARGING
TIME

NEW



| LR2 ES76 | |
|----------------------------|-----------------------------------|
| Cutting width: | 76 cm |
| Lawn area (rec.): | 3.000 m²/h |
| Collecting volume: | Optional 115 l |
| Engine: | Cub Cadet 56 V / 30 Ah / 1.500 Wh |
| Output Watts: | 3,0 kW |
| Drive: | Electric drive |
| Cutting height adjustment: | 5 positions |
| Model no.: | 33BA27JD603 |
| Price: | - |

*Deviations are possible depending on lawn area

READY TO GO

Hop on and take off: Power and performance are always available – all year round!

ZERO EMISSIONS

The LR2 ES76 is particularly quiet and completely emission-free. This not only benefits the environment but also the neighbours.

MAINTENANCE- AND SERVICE-FRIENDLY

The electric motor needs no spark plugs, fuel filter and carburetor, which makes it much easier to maintain.

ULTRA-BRIGHT LED HEADLIGHTS

High visibility even when working at dawn or dusk.

NO REDUCTION OF PERFORMANCE WHILE BATTERY LEVELS DECREASE

SAFE-RETURN-FUNCTION

At a battery level of 10 %, the cutting deck automatically switches off making sure enough power remains to safely return to the charging station.

ELECTRONIC SPEED CONTROL

Works like cruise control and ensures that the selected pace remains constant, even in uneven terrain or in tall grass.

REVTEK™ TECHNOLOGY

The Reverse Mowing Technology allows you to continue mowing while backing up your MINI-RIDER. As a safety precaution this function must be activated manually.

LI-ION-POWER


Modern battery technology ensures a long service life as well as speedy charging cycles – once hooked up to an outlet, the battery is fully recharged within 4 hours.



Li-Ion
ELECTRIC

XT2™

ENDURO SERIES™



Learn more

**MOWING
TIME
90 MIN***
**4 HOURS
CHARGING
TIME**

NEW



| XT2 ES107 | |
|----------------------------|-----------------------------------|
| Cutting width: | 107 cm |
| Lawn area (rec.): | 8.000 m ² /h |
| Collecting volume: | Optional 200 l |
| Engine: | Cub Cadet 56 V / 60 Ah / 3.000 Wh |
| Output Watts: | 3,0 kW |
| Drive: | Electric drive |
| Cutting height adjustment: | 12 positions |
| Model no.: | 33ABA7ES603 |
| Price: | - |

*Deviations are possible depending on lawn area

Li-Ion
ELECTRIC



LI-ION-POWER

Modern battery technology ensures a long service life as well as speedy charging cycles – once hooked up to an outlet, the battery is fully recharged within 4 hours.

SUSTAINABLE ENERGY. STRONG POWER.

The XT Series flagship tractor platform is also combined with the advantages of e-mobility. Inside the XT2 ES107, powerful electric motors of the latest technology operate. Powered by a Li-ION battery with 56 V and a rated capacity of 60 Ah, this lawn tractor is as powerful as its petrol-powered relatives. With a running time of approx. 90 minutes, depending on lawn and soil conditions and a cutting width of 107 cm, even large lawns can be mastered quickly and in one piece. Also great: Cub Cadet gives you a 3-year warranty on the lawn tractor and the battery – longer than with hardly any other manufacturer!

ZERO EMISSIONS

The XT2 ES107 runs particularly quiet and with no emissions. This not only benefits the environment but also the neighbours.

SERVICE- AND MAINTENANCE-FRIENDLY

The electric motor does not contain any wearing parts such as spark plugs or fuel filters – these therefore do not need to be replaced.

NO REDUCTION OF PERFORMANCE WHILE BATTERY LEVELS DECREASE



THE SMALLEST TURNING RADIUS ON THE MARKET
Innovative TIGHT TURN xTREME Technology for an unmatched 17 cm turning radius.



IMMEDIATE AVAILABILITY

Hop on and get started: Power and performance are always at your disposal – all year round.

USB-PORT

Charge your electronic devices while driving, for example your smartphone.

PARTICULARLY SMOOTH-RUNNING

A light touch of the pedal is all it takes for the electric mower to start moving smoothly. This lawn tractor is easier to drive than ever before.

SIDE DISCHARGE, COLLECT OR MULCH

The XT2 ES107 is a versatile companion – with its side discharge, an optional grass catcher or the optional mulching kit (accessory). Mulching and collecting may reduce the running time.

100 % ELECTRIC.
0 % COMPROMISE.

Think electric equipment compromises power?
Think again. Our 60V MAX battery system will
provide you with the premium cut quality and
performance you expect in yardcare.

LH5
FORCE SERIES



+ AVAILABLE IN BOTH 2,5 AH AND
5,0 AH OPTIONS

+ ZERO EMISSIONS FROM EQUIPMENT'S
POWER SOURCE

+ EASY AND RELIABLE PUSH TO START
BUTTON – NO MORE PULLING CORDS

+ BRUSHLESS MOTOR MAXIMIZES
EFFICIENCY AND EXTENDS LIFE
OF MACHINE

+ UP TO 80 % QUIETER THAN
COMPARABLE GAS EQUIPMENT

+ ALL HAND TOOLS WITH PRACTICAL
HOOK FOR SPACE-SAVING WALL
STORAGE



EASY TO STORE
Space-saving design with folding
handle for upright storage and
easy cleaning.

Ultimate efficiency and robust design combined with the latest in battery technology. The noiseless and zero emissions LM5 cordless lawn mower sets you up for the future. Choose between collecting, mulching and side discharge – with first-class cut quality, as you have learned to expect from any Cub Cadet mower.



PREMIUM BALL BEARINGS
Ball bearings on all four wheels and
rubber grips ensure a smooth ride.



ROBUST STEEL MOWER DECK
The 53 cm wide steel cutting deck is
suitable for uneven terrain.



VARIABLE DRIVE
Stepless speed control and
rear-wheel drive make gar-
dening much easier.



**6-FOLD CUTTING HEIGHT
ADJUSTMENT**
The cutting height can be
conveniently adjusted
centrally lever.



**BOOSTED
AIRFLOW
TECHNOLOGY**

**BOOSTED AIRFLOW
TECHNOLOGY**
For optimal transport
of the cuttings to the
grass catcher.

| LM5 E 51 R | |
|----------------------------|-----------------------|
| Cutting width: | 51 cm |
| Lawn area (rec.): | 700 m ² /h |
| Collecting volume: | 60 l |
| Engine: | Battery 54V, Electric |
| Drive: | Rear wheel drive |
| Cutting height adjustment: | Central |
| Model no.: | 18AST94603 |
| Price (without battery): | - |

MORE POWER FOR YOUR GARDEN



The 60V MAX lithium-ion batteries are interchangeable throughout the range of equipment. If you have power left from one task, swap the battery with another machine to continue on.

| 60V BATTERY – BP 6025 | 60V BATTERY – BP 6050 | 60V CHARGER – BC 6020 |
|------------------------------------|------------------------------------|---------------------------|
| Capacity / Energy: 2,5 Ah / 135 Wh | Capacity / Energy: 5,0 Ah / 270 Wh | Charging current: 2,0 A |
| Charging time: 75 min | Charging time: 150 min | Weight: 0,7 kg |
| Weight: 1,2 kg | Weight: 1,9 kg | Model number: 49AL601-603 |
| Model number: 49AP601-603 | Model number: 49AP602-603 | Price: - |
| Price: - | Price: - | |

- Cruise control to set the speed
- Highly efficient brushless motor with maximum service life
- Axial fan delivery up to 180 km/h of power



| 60V LEAF BLOWER – LH5 B60 | |
|------------------------------|--|
| Running time: | Up to 90 min (2,5 Ah battery) / Up to 180 min (5,0 Ah battery) |
| Speed (max.): | Up to 180 km/h |
| Air flow: | Up to 1.080 m³/h |
| Axial fan: | Standard |
| Weight without/with battery: | 2,5 / 3,7 kg (with 2,5 Ah battery) |
| Model number: | 41AT6BE-603 |
| Price (without battery): | - |

- Tool-free chain change and chain tensioning
- Spirit level allows precise and level cutting
- High-efficiency brushless motor optimizes power, performance and longevity



| 60V CHAIN SAW – LH5 C60 | |
|------------------------------|--|
| Running time: | Up to 80 min (2,5 Ah battery) / Up to 160 min (5,0 Ah battery) |
| Blade length: | 40 cm |
| Chain speed: | 13,5 m/s |
| Chain pitch: | 3/8" |
| Weight without/with battery: | 4,4 / 5,6 kg (with 2,5 Ah battery) |
| Model number: | 41AT6CGR603 |
| Price (without battery): | - |

| 60V TRIMMER – LH5 T60 | |
|------------------------------|---|
| Running time: | 45 min (2,5 Ah battery) / 90 min (5,0 Ah battery) |
| Cutting width: | 33 cm |
| Line thickness: | Ø 2,0 mm, double |
| Telescopic tube: | Standard |
| Weight without/with battery: | 3,6 / 4,8 kg (with 2,5 Ah battery) |
| Model number: | 41AT6TGT603 |
| Price (without battery): | - |






- Two-stage speed control
- Line can be replaced with spool attached
- Lightweight design – 4,8 kg with battery

| 60V HEDGE TRIMMER – LH5 H60 | |
|------------------------------|--|
| Running time: | 80 min (2,5 Ah battery) / 160 min (5,0 Ah battery) |
| Cutting movements (max.): | 1.500/min |
| Blade length: | 60 cm |
| Blade spacing: | 19 mm |
| Weight without/with battery: | 3,4 / 4,6 kg (with 2,5 Ah battery) |
| Model number: | 41AT6HK-603 |
| Price (without battery): | - |







- Laser cut blade
- Oscillating saw at the end of the knife
- Full-bale handle maximizes maneuverability and reduces vibration



| | 60V LEAF BLOWER LH5 B60 | 60V HEDGE TRIMMER LH5 H60 | 60V TRIMMER LH5 T60 |
|--|---|---|---|
| FEATURES | | | |
| Runtime | Up to 90 min (2,5 Ah battery) / Up to 180 min (5,0 Ah battery) | 80 min (2,5 Ah battery) / 160 min (5,0 Ah battery) | 45 min (2,5 Ah battery) / 90 min (5,0 Ah battery) |
| Speed (max.) | Up to 180 km/h | – | – |
| Air flow | Up to 1.080 m³/h | – | – |
| Speed stages | Stepless | – | – |
| Cutting movements (max.) | – | 1.500/min | – |
| Blade length | – | 60 cm | – |
| Cutting width | – | 19 mm | 33 cm |
| Chain speed | – | – | – |
| Line thickness | – | – | Ø 2,0 mm, double |
| Line spool | – | – | Easy winding without removing the reel |
| MAIN FEATURES | | | |
| Axial fan | Standard | – | – |
| Comfort handle | – | Standard | Standard |
| Dual action blades | – | Standard | – |
| DIMENSIONS | | | |
| LpA/LwA/LwAg (dB) | 89/101/103 | 79,5/91,5/95 | 79,5/93/96 |
| Vibration value hand/arm / K-factor | 2,5 / 1,5 m/s² | 3,0 / 1,5 m/s² | 3,5 / 1,5 m/s² |
| Dimensions (L/W/H) | 53 cm / 32 cm / 23 cm | 106 cm / 26 cm / 24 cm | 106 cm / 26 cm / 24 cm |
| Net weight | 2,5 / 3,7 kg (with 2,5 Ah battery) | 3,4 / 4,6 kg (with 2,5 Ah battery) | 3,6 / 4,8 kg (with 2,5 Ah battery) |
| PRICE | | | |
| Model number | 41AT6BE-603 | 41AT6HK-603 | 41AT6TGT603 |
| EAN |  |  |  |
| Price | - | - | - |

BATTERIES AND CHARGER


| | 60V BATTERY BP 6025 | 60V BATTERY BP 6050 | 60V CHARGER BC 6020 |
|-------------------|---|---|---|
| Capacity / Energy | 2,5 Ah / 135 Wh | 5,0 Ah / 270 Wh | 2,0 A Charging current |
| Charging time | 75 min | 150 min | – |
| Voltage | 54 V | 54 V | – |
| Net weight | 1,2 kg | 1,9 kg | 0,7 kg |
| Model number | 49AP601-603 | 49AP602-603 | 49AL601-603 |
| EAN |  |  |  |
| Price | - | - | - |

| | 60V CHAIN SAW LH5 C60 |
|--|---|
| FEATURES | |
| Runtime | Up to 80 min (2,5 Ah battery) / Up to 160 min (5,0 Ah battery) |
| Speed (max.) | – |
| Air flow | – |
| Speed stages | – |
| Cutting movements (max.) | – |
| Blade length | 40 cm |
| Cutting width | – |
| Chain speed | 13,5 m/s |
| Line thickness | – |
| Line spool | – |
| MAIN FEATURES | |
| Axial fan | – |
| Comfort handle | – |
| Dual action blades | – |
| DIMENSIONS | |
| LpA/LwA/LwAg (dB) | 91/102/104 |
| Vibration value hand/arm / K-factor | 3,5 / 1,5 m/s² |
| Dimensions (L/W/H) | 93 / 29 / 27 |
| Net weight | 4,4 / 5,6 kg (with 2,5 Ah battery) |
| PRICE | |
| Model number | 41AT6CGR603 |
| EAN |  |
| Price | - |

OVERVIEW TABLES FOR THE E-RIDER:

• LR2 ES76 can be found on **page 41**

• XT2 ES107 can be found on **page 61**

| | 60V LAWNMOWER LM5 E 51 R |
|---|---|
| DRIVE SYSTEM | |
| Runtime | 30 min (5,0 Ah battery) |
| Drive | Rear wheel drive |
| Driving stages | Variable |
| Speed (max.) | Variable |
| CUTTING SYSTEM | |
| Lawn area (rec./up to) | 700 m²/h |
| Housing (material) | Steel |
| Cutting width | 51 cm |
| Mowing options | 3-in-1 |
| Cutting height adjustment | Central |
| Cutting height (min/max) | 38-88 mm |
| Bagging | Inclusive |
| Mulch Kit | Inclusive |
| Side discharge | – |
| Rear discharge without grass catcher | Standard |
| DISCHARGE SYSTEM | |
| Grass catcher | Soft bag |
| Grass catcher (capacity) | 60 l |
| Filling level indicator | – |
| WHEELS | |
| Wheels (f/r) | 150 mm / 200 mm |
| Wheel bearing | Double ball bearings |
| COMFORT | |
| Cutting deck washing nozzle | – |
| Bar | Ergo with softgrip |
| Folding bar | Standard |
| Height-adjustable bar | Standard, 3 steps |
| Soft-Grip | Standard |
| DIMENSIONS | |
| LpA/LwA/LwAg (dB) | n.a./n.a./n.a. |
| Vibration value hand/arm / K-factor | 2,5 / 1,5 m/s² |
| Dimensions (L/W/H) | 160 cm / 56 cm / 110 cm |
| Net weight | 32 kg |
| PRICE | |
| Model number | 18ASTR94603 |
| EAN |  |
| Price | - |

LM1
FORCE SERIES

3-in-1
OPTION

REAR DISCHARGER,
COLLECTING &
OPTIONAL MULCHING

To change your lawn mower from discharging mode to mulching, simply engage the optionally available mulching wedge.

LM SERIES – PERFECT CUT AND BAGGING

High efficiency alongside typical Cub Cadet quality – this is where Cub Cadet lawn mowers come into play. A durable construction extends the service life, while the Cub Cadet OHV engine delivers the right power to meet your needs. The Cub Cadet LM Series gives you the choice between bagging and discharging the clippings. A mulch kit is also available as an accessory, giving you the option of mulching your lawn. Many ergonomic features help get the job done while reducing stress – the easy-empty grass catcher, the ergonomically shaped handlebar, the convenient central height adjustment and the ball bearing wheels all help enhance the comfort even more.

CENTRAL CUTTING
HEIGHT ADJUSTMENT

Comfortably change the cutting height centrally with one lever – choose from 6 different positions.

ERGONOMIC HANDLEBAR

The ergonomic handlebar is height adjustable and fully foldable, making the mower particularly easy to store.

LARGE GRASS CATCHER

A large grass catcher reduces the number of dump runs. Saving you time – fewer trips to/from the compost heap.

SELF-PROPELLED

Self-propelled mowers enable easy mowing on uneven and sloping terrain. MySpeed models can adapt to your personal pace (LM2 and LM3 series).



LM1 AP46

| | |
|----------------------------|--------------------------------|
| Cutting width: | 46 cm |
| Lawn area (rec.): | 700 m²/h |
| Collecting volume: | 60 l |
| Engine: | Cub Cadet 35 OHV, Pull starter |
| Engine displacement: | 79 cm³ |
| Drive: | Pushed |
| Cutting height adjustment: | 6 positions/central |
| Model no.: | 11C-TQMG603 |
| Price: | - |



LM1 AR46

| | |
|----------------------------|--------------------------------|
| Cutting width: | 46 cm |
| Lawn area (rec.): | 700 m²/h |
| Collecting volume: | 60 l |
| Engine: | Cub Cadet 35 OHV, Pull starter |
| Engine displacement: | 79 cm³ |
| Drive: | Rear-wheel drive |
| Cutting height adjustment: | 6 positions/central |
| Model no.: | 12C-TQMG603 |
| Price: | - |



LM1 CR53

| | |
|----------------------------|--------------------------------|
| Cutting width: | 53 cm |
| Lawn area (rec.): | 950 m²/h |
| Collecting volume: | 70 l |
| Engine: | Cub Cadet 45 OHV, Pull starter |
| Engine displacement: | 140 cm³ |
| Drive: | Rear-wheel drive |
| Cutting height adjustment: | 6 positions/central |
| Model no.: | 12D-PQSC603 |
| Price: | - |



LM1 DP53

| | |
|----------------------------|--------------------------------|
| Cutting width: | 53 cm |
| Lawn area (rec.): | 950 m²/h |
| Collecting volume: | 70 l |
| Engine: | Cub Cadet 55 OHV, Pull starter |
| Engine displacement: | 159 cm³ |
| Drive: | Pushed |
| Cutting height adjustment: | 6 positions/central |
| Model no.: | 11E-PTKC603 |
| Price: | - |

LM2
FORCE SERIES

3-in-1

REAR DISCHARGER
COLLECTING & MULCHING

Select the right mowing method for your Cub Cadet lawn mower with a simple flick of the wrist. Whether collecting clippings, discharging them from the rear or mulching – all options are easily selectable on this mower.



ELECTRIC START
Electric start gives you maximum comfort. Start your lawn mower at the turn of a key.

**HEIGHT ADJUSTABLE
HANDLE**
Adapt the ergonomic handlebar to your height of choice, for comfortable mowing free of stress and fatigue.

**CENTRAL CUTTING
HEIGHT ADJUSTMENT**
One grip to adjust all four wheels simultaneously. Less effort and time taken, matchless comfort.

LARGE GRASS CATCHER
A large grass catcher reduces the number of dump runs. Saving you time – fewer trips to/from the compost heap.

LM2 SERIES – POWERFUL AND COMFORTABLE

Our LM2 series mowers come with powerful Cub Cadet engines and many comfort features. First and foremost, there's the MySpeed wheel drive, which makes mowing incredibly comfortable and flexible. Simply walk at your own pace, and the LM2 series mower will follow your lead.



| | |
|----------------------------|--|
| LM2 DR46s | |
| Cutting width: | 46 cm |
| Lawn area (rec.): | 750 m ² /h |
| Collecting volume: | 60 l |
| Engine: | Cub Cadet 55 OHV, Pull starter/AutoChoke |
| Engine displacement: | 159 cm ³ |
| Drive: | Rear-wheel drive |
| Cutting height adjustment: | 6 positions/central |
| Model no.: | 12EBTQKC603 |
| Price: | - |



| | |
|----------------------------|----------------------------|
| LM2 DR46es | |
| Cutting width: | 46 cm |
| Lawn area (rec.): | 750 m ² /h |
| Collecting volume: | 60 l |
| Engine: | Cub Cadet 55 OHV, Electric |
| Engine displacement: | 159 cm ³ |
| Drive: | Rear-wheel drive |
| Cutting height adjustment: | 6 positions/central |
| Model no.: | 12ECTQS7603 |
| Price: | - |



| | |
|----------------------------|--|
| LM2 DR53s | |
| Cutting width: | 53 cm |
| Lawn area (rec.): | 950 m ² /h |
| Collecting volume: | 70 l |
| Engine: | Cub Cadet 55 OHV, Pull starter/AutoChoke |
| Engine displacement: | 159 cm ³ |
| Drive: | Rear-wheel drive |
| Cutting height adjustment: | 6 positions/central |
| Model no.: | 12EBPQKC603 |
| Price: | - |

Images show previous year's models

4-in-1

REAR BAGGING, MULCHING, SIDE & REAR DISCHARGE

4-in-1 gives you optimal mower flexibility with four usage modes. You can attach a side deflector to the deck and turn the unit into a side-discharging mower. You can operate it as a rear-discharger or attach a collecting bag – or use the mulching option as the fourth operation option. Giving you freedom to select the ideal discharge solution, whatever the condition.

LM3 SERIES - STRONG PERFORMANCE AND MAXIMUM FLEXIBILITY

The flagship models of the LM Series will impress you with superb features: a range of powerful engines for rapid mowing, the 4-in-1 system for total flexibility in mowing options, variable driving speed with MySpeed now available on all models and many more convenient features.




MYSPEED DRIVE SYSTEM

LM3 series is equipped with the MySpeed Drive System, which automatically switches on as soon as you push the handle. The speed automatically adjusts to your walking speed.



EASY STARTING B&S ENGINE

The Briggs & Stratton engines with ReadyStart® Technology and Start Guarantee® let you start the mower more easily and confidently.



POWERFUL ENGINE

All LM3 series lawn mowers are equipped with extremely powerful Cub Cadet OHV, Kawasaki or Briggs & Stratton engines, which always bring out the maximum power.



HIGH REAR WHEELS

High rear wheels to negotiate pot-holes and uneven lawns effortlessly. For ultra-comfortable handling and smooth driving.



A HARD-TOP BAG WITH A FILL INDICATOR

The dustproof hard-top catcher with fill indicator means less dust during dry periods, while the fill indicator flap indicates when the grass catcher is full and needs emptying.



LC3 DP56

| | |
|-----------------|------------------|
| Cutting width: | 56 cm |
| Cutting height: | 60–110 mm |
| Line: | Ø 3,9 mm |
| Engine: | Cub Cadet 55 OHV |
| Wheels: | Ø 360 mm |
| Drive: | Pushed |
| Net weight: | 31 kg |
| Model no.: | 25C-262E603 |
| Price: | - |



4-in-1
POWERED BY
Cub Cadet
MYSPEED

LM3 CR46s

| | |
|----------------------------|--|
| Cutting width: | 46 cm |
| Lawn area (rec.): | 750 m²/h |
| Collecting volume: | 60 l |
| Engine: | B&S 575 EX-Series, ReadyStart®, Pull starter |
| Engine displacement: | 140 cm³ |
| Drive: | Rear-wheel drive |
| Cutting height adjustment: | 6 positions/central |
| Model no.: | 12EBTV5E603 |
| Price: | - |



4-in-1
POWERED BY
Cub Cadet
MYSPEED

LM3 CRC46s

| | |
|----------------------------|--------------------------------|
| Cutting width: | 46 cm |
| Lawn area (rec.): | 750 m²/h |
| Collecting volume: | 60 l |
| Engine: | Cub Cadet 45 OHV, Pull starter |
| Engine displacement: | 140 cm³ |
| Drive: | Rear-wheel drive |
| Cutting height adjustment: | 6 positions/central |
| Model no.: | 12DBTVSC603 |
| Price: | - |



4-in-1
POWERED BY
Cub Cadet
MYSPEED

LM3 CR53s

| | |
|----------------------------|-------------------------------------|
| Cutting width: | 53 cm |
| Lawn area (rec.): | 950 m²/h |
| Collecting volume: | 70 l |
| Engine: | B&S 750 EX DOV Series, Pull starter |
| Engine displacement: | 161 cm³ |
| Drive: | Rear-wheel drive |
| Cutting height adjustment: | 6 positions/central |
| Model no.: | 12DBPV5L603 |
| Price: | - |



4-in-1
POWERED BY
Cub Cadet
MYSPEED

LM3 DR53es




| | |
|----------------------------|-------------------------------|
| Cutting width: | 53 cm |
| Lawn area (rec.): | 950 m²/h |
| Collecting volume: | 70 l |
| Engine: | Cub Cadet 55 OHV ES, Electric |
| Engine displacement: | 159 cm³ |
| Drive: | Rear-wheel drive |
| Cutting height adjustment: | 6 positions/central |
| Model no.: | 12ECPVS7603 |
| Price: | - |




STRONG ENOUGH TO CUT EVERYTHING

The Cub Cadet LC3 DP56 mobile lawn trimmer is so strong it meets any challenge – however tough the conditions. With the powerful Cub Cadet engine and ultra-large, 56-cm cutting width, trim long grass and weeds at a stroke, just as if mowing short grass.

REPLACEMENT LINE FOR LC3 DP56

| | |
|--|---|
| 10 pcs. of cutting line AF3.20, cut to 3,9 mm x 47 cm length | 4 056494 116662 Mod. no.: 1182-WS-0001 Price: - |
|--|---|

| | LM1 AP46 | LM1 AR46 | LM1 CR53 |
|-------------------------------------|---|---|---|
| ENGINE | | | |
| Engine type | Cub Cadet 35 OHV | Cub Cadet 35 OHV | Cub Cadet 45 OHV |
| Engine displacement | 79 cm³ | 79 cm³ | 140 cm³ |
| Rated power | 1,5 kW / 2.800 min ⁻¹ | 1,5 kW / 2.800 min ⁻¹ | 2,1 kW / 2.800 min ⁻¹ |
| Engine start | Pull starter | Pull starter | Pull starter |
| Tank volume <i>(capacity)</i> | 0,75 l | 0,75 l | 1,0 l |
| DRIVE SYSTEM | | | |
| Drive | Pushed | Rear-wheel drive | Rear-wheel drive |
| Selectable speeds | – | 1 | 1 |
| Speed <i>(max)</i> | – | 3,6 km/h | 3,6 km/h |
| CUTTING SYSTEM | | | |
| Lawn area <i>(rec./up to)</i> | 700 m²/h | 700 m²/h | 950 m²/h |
| Cutting deck <i>(material)</i> | Steel | Steel | Steel |
| Cutting width | 46 cm | 46 cm | 53 cm |
| Cutting options | 3-in-1 Option | 3-in-1 Option | 3-in-1 Option |
| Cutting height adjustment | 6 positions/central | 6 positions/central | 6 positions/central |
| Cutting height <i>(min–max)</i> | 28–92 mm | 28–92 mm | 28–92 mm |
| Bagging | Standard | Standard | Standard |
| Mulch Kit | Optional (196-588-678) | Optional (196-588-678) | Optional (196-589-678) |
| Side discharge | – | – | – |
| Rear discharge without collector | Standard | Standard | Standard |
| BAGGING | | | |
| Gras catcher type | Soft bag | Soft bag | Soft bag |
| Collecting volume | 60 l | 60 l | 70 l |
| Bag fill indicator | – | – | – |
| WHEELS | | | |
| Wheels <i>(F/R)</i> | 180 mm / 200 mm | 180 mm / 200 mm | 200 mm / 200 mm |
| Wheel bearing | double ball bearings | double ball bearings | double ball bearings |
| COMFORT | | | |
| Washing nozzle | Standard | Standard | Standard |
| Handlebar type | Ergonomic | Ergonomic | Ergonomic |
| Foldable handlebar | Standard | Standard | Standard |
| Height adjustable handlebar | Standard | Standard | Standard |
| Soft-Grip | Standard | Standard | Standard |
| DIMENSIONS | | | |
| LpA/LwA/LwAg <i>(dB)</i> | 84/94/96 | 84/94/96 | 86/96/98 |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions <i>(L/W/H)</i> | 155 cm / 49 cm / 114 cm | 155 cm / 49 cm / 114 cm | 162 cm / 58 cm / 114 cm |
| Net weight | 28 kg | 31 kg | 34 kg |
| PRICE | | | |
| Model number | 11C-TQMG603 | 12C-TQMG603 | 12D-PQSC603 |
| EAN |  4 008423 892390 |  4 008423 892406 |  4 008423 872637 |
| Price | - | - | - |

| | LM1 DP53 | LM2 DR46s | LM2 DR46es |
|-------------------------------------|---|---|---|
| ENGINE | | | |
| Engine type | Cub Cadet 55 OHV | Cub Cadet 55 OHV | Cub Cadet 55 OHV |
| Engine displacement | 159 cm³ | 159 cm³ | 159 cm³ |
| Rated power | 2,5 kW / 2800 min ⁻¹ | 2,5 kW / 2.800 min ⁻¹ | 2,5 kW / 2.800 min ⁻¹ |
| Engine start | Pull starter | Pull starter/AutoChoke | Electric |
| Tank volume <i>(capacity)</i> | 1,0 l | 1,0 l | 1,0 l |
| DRIVE SYSTEM | | | |
| Drive | Pushed | Rear-wheel drive | Rear-wheel drive |
| Selectable speeds | – | Variable | Variable |
| Speed <i>(max)</i> | – km/h | 0–3,6 km/h | 0–3,6 km/h |
| CUTTING SYSTEM | | | |
| Lawn area <i>(rec./up to)</i> | 950 m²/h | 750 m²/h | 750 m²/h |
| Cutting deck <i>(material)</i> | Steel | Steel | Steel |
| Cutting width | 53 cm | 46 cm | 46 cm |
| Cutting options | 4-in-1 | 3-in-1 | 3-in-1 |
| Cutting height adjustment | 6 positions/central | 6 positions/central | 6 positions/central |
| Cutting height <i>(min–max)</i> | 28–92 mm | 28–92 mm | 28–92 mm |
| Bagging | Standard | Standard | Standard |
| Mulch Kit | Standard | Standard | Standard |
| Side discharge | Standard | – | – |
| Rear discharge without collector | Standard | Standard | Standard |
| BAGGING | | | |
| Gras catcher type | Soft bag | Soft bag | Soft bag |
| Collecting volume | 70 l | 60 l | 60 l |
| Bag fill indicator | – | – | – |
| WHEELS | | | |
| Wheels <i>(F/R)</i> | 200 mm / 280 mm | 180 mm / 200 mm | 180 mm / 200 mm |
| Wheel bearing | double ball bearings | double ball bearings | double ball bearings |
| COMFORT | | | |
| Washing nozzle | Standard | Standard | Standard |
| Handlebar type | Ergonomic | MySpeed | MySpeed |
| Foldable handlebar | Standard | Standard | Standard |
| Height adjustable handlebar | Standard | Standard | Standard |
| Soft-Grip | Standard | – | – |
| DIMENSIONS | | | |
| LpA/LwA/LwAg <i>(dB)</i> | 86/96/98 | 84/94/96 | 84/94/96 |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions <i>(L/W/H)</i> | – cm / – cm / – cm | 150 cm / 49 cm / 114 cm | 150 cm / 49 cm / 114 cm |
| Net weight | 39 kg | 31 kg | 35 kg |
| PRICE | | | |
| Model number | 11E-PTKC603 | 12EBTQKC603 | 12ECTQS7603 |
| EAN |  4 008423 877007 |  4 008423 866148 |  4 008423 866247 |
| Price | - | - | - |

| LM2 DR53sLM3 CR46sLM3 CRC46s | | | |
|-------------------------------------|----------------------------------|----------------------------------|----------------------------------|
| ENGINE | | | |
| Engine type | Cub Cadet 55 OHV | B&S 575 EX-Series, ReadyStart® | Cub Cadet 45 OHV |
| Engine displacement | 159 cm³ | 140 cm³ | 140 cm³ |
| Rated power | 2,5 kW / 2.600 min ⁻¹ | 2,1 kW / 2.800 min ⁻¹ | 2,1 kW / 2.800 min ⁻¹ |
| Engine start | Pull starter/AutoChoke | Pull starter | Pull starter |
| Tank volume (capacity) | 1,0 l | 0,8 l | 1,0 l |
| DRIVE SYSTEM | | | |
| Drive | Rear-wheel drive | Rear-wheel drive | Rear-wheel drive |
| Selectable speeds | Variable | Variable | Variable |
| Speed (max) | 0–3,6 | 0–3,6 km/h | 0–3,6 km/h |
| CUTTING SYSTEM | | | |
| Lawn area (rec./up to) | 950 m²/h | 750 m²/h | 750 m²/h |
| Cutting deck (material) | Steel | Steel | Steel |
| Cutting width | 53 cm | 46 cm | 46 cm |
| Cutting options | 3-in-1 | 4-in-1 | 4-in-1 |
| Cutting height adjustment | 6 positions/central | 6 positions/central | 6 positions/central |
| Cutting height (min–max) | 28–92 mm | 28–92 mm | 28–92 mm |
| Bagging | Standard | Standard | Standard |
| Mulch Kit | Standard | Standard | Standard |
| Side discharge | – | Standard | Standard |
| Rear discharge without collector | Standard | Standard | Standard |
| BAGGING | | | |
| Gras catcher type | Soft bag | Soft bag with hard top | Soft bag with hard top |
| Collecting volume | 70 l | 60 l | 60 l |
| Bag fill indicator | – | Standard | Standard |
| WHEELS | | | |
| Wheels (F/R) | 200 mm / 280 mm | 180 mm / 280 mm | 180 mm / 280 mm |
| Wheel bearing | double ball bearings | double ball bearings | double ball bearings |
| COMFORT | | | |
| Washing nozzle | Standard | Standard | Standard |
| Handlebar type | MySpeed | MySpeed | MySpeed |
| Foldable handlebar | Standard | Standard | Standard |
| Height adjustable handlebar | Standard | Standard | Standard |
| Soft-Grip | – | – | – |
| DIMENSIONS | | | |
| LpA/LwA/LwAg (dB) | 86/96/98 | 84/94/96 | 84/94/96 |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions (L/W/H) | 162 cm / 58 cm / 114 cm | 155 cm / 49 cm / 114 cm | 155 cm / 49 cm / 114 cm |
| Net weight | 34 kg | 34 kg | 34 kg |
| PRICE | | | |
| Model number | 12EBPQKC603 | 12EBTV5E603 | 12DBTVSC603 |
| EAN | 4 008423 866131 | 4 008423 859324 | 4 008423 877045 |
| Price | - | - | - |

| LM3 CR53sLM3 DR53esLC3 DP56 | | | |
|-------------------------------------|----------------------------------|----------------------------------|----------------------------------|
| ENGINE | | | |
| Engine type | B&S 750 EX DOV Series | Cub Cadet 55 OHV ES | Cub Cadet 55 OHV |
| Engine displacement | 161 cm³ | 159 cm³ | 159 cm³ |
| Rated power | n.v. kW / n.v. min ⁻¹ | 2,5 kW / 2.600 min ⁻¹ | 2,1 kW / 2.800 min ⁻¹ |
| Engine start | Pull starter | Electric | Pull starter |
| Tank volume (capacity) | 1,0 l | 1,0 l | 1,0 l |
| DRIVE SYSTEM | | | |
| Drive | Rear-wheel drive | Rear-wheel drive | Pushed |
| Selectable speeds | Variable | Variable | – |
| Speed (max) | 0–3,6 km/h | 0–3,6 km/h | – |
| CUTTING SYSTEM | | | |
| Lawn area (rec./up to) | 950 m²/h | 950 m²/h | 1.000 m²/h |
| Cutting deck (material) | Steel | Steel | – |
| Cutting width | 53 cm | 53 cm | 56 cm |
| Cutting options | 4-in-1 | 4-in-1 | – |
| Cutting height adjustment | 6 positions/central | 6 positions/central | – |
| Cutting height (min–max) | 28–92 mm | 28–92 mm | 60–110 mm |
| Bagging | Standard | Standard | – |
| Mulch Kit | Standard | Standard | – |
| Side discharge | Standard | Standard | – |
| Rear discharge without collector | Standard | Standard | – |
| BAGGING | | | |
| Gras catcher type | Soft bag with hard top | Soft bag with hard top | – |
| Collecting volume | 70 l | 70 l | – |
| Bag fill indicator | Standard | Standard | – |
| WHEELS | | | |
| Wheels (F/R) | 200 mm / 280 mm | 200 mm / 280 mm | Ø 360 mm |
| Wheel bearing | double ball bearings | double ball bearings | Slide bearings |
| COMFORT | | | |
| Washing nozzle | Standard | Standard | – |
| Handlebar type | MySpeed | MySpeed | 3 positions |
| Foldable handlebar | Standard | Standard | – |
| Height adjustable handlebar | Standard | Standard | – |
| Soft-Grip | – | – | – |
| DIMENSIONS | | | |
| LpA/LwA/LwAg (dB) | 86/96/98 | 86/96/98 | 93/106/108 |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² | 6,5 / 1,5 m/s² |
| Dimensions (L/W/H) | 162 cm / 58 cm / 114 cm | 162 cm / 58 cm / 114 cm | 140 cm / 55 cm / 100 cm |
| Net weight | 36 kg | 41 kg | 31 kg |
| PRICE | | | |
| Model number | 12DBPV5L603 | 12ECPVS7603 | 25C-262E603 |
| EAN | 4 008423 859355 | 4 008423 866155 | 4 008423 881967 |
| Price | - | - | - |



Learn more

LR1

FORCE SERIES

200 LITRE GRASS CATCHER

A 200 litre grass catcher bag (models LR1 MR76 and LR2 NR76) with dust protection cover, two grips and fill indicator. Can be emptied from the driver's seat.

4,9 LITRE FUEL TANK
The large fuel tank with fuel indicator gives you the freedom to mow your lawn in a full cycle – no refuel needed.

LARGE TYRES
Lawn-friendly, yet handy, even on uneven terrain.

STEP-THROUGH FRAME
With soft rubber foot pads, for easy access and comfortable foot rest.

CUTTING HEIGHT ADJUSTMENT & PTO CLUTCH
Easily adjustable cutting height over 5 positions, from 38 to 95 mm. Both levers are located ergonomically on the right side of the seat.

COMPACT AND VERSATILE LIKE NEVER BEFORE

Modern design, versatility and comfortable mowing – just three of the many reasons to go for the Cub Cadet MINI-RIDER. The compact and manoeuvrable Cub Cadet MINI-RIDER models with electric start are equipped with one of the powerful and low-maintenance Cub Cadet engines.

If you want to collect, discharge or mulch your grass clippings, this is your go-to mower. Thanks to their space saving design, these Cub Cadet MINI-RIDER models are almost as compact as a conventional walk behind mower in terms of garage space.



TRANSMATIC TRANSMISSION
The transmatic transmission allows shift-on-the-go speed control. Simply choose your driving direction, set the desired basic speed and start mowing. On the Cub Cadet MINI-RIDER LR1 MR76, select between 6 forward and 6 reverse speeds.



76 CM MOWING DECK
Selectable collecting, mulching and discharge options come as standard with model LR1 MR76. The model LR1 MS76 offers mulching and side discharge options. Superior mulching, excellent collection and side discharge for spreading. Whatever you choose, the MINI-RIDER can handle it. Thanks to the new blade design, you now achieve even better collection results.



The German garden magazine „Familienheim und Garten“ awarded the MINI-RIDER LR1 MR76 a „good“ verdict in testing.

The unit convinced in terms of performance and versatility in particular. The electric start and a large fuel tank of approx. 5 litres allow mowing for extended periods without having to refuel.



| LR1 MR76 | |
|----------------------------|----------------|
| Cutting width: | 76 cm |
| Lawn area (rec.): | 2.500 m²/h |
| Collecting volume: | Standard 200 l |
| Engine: | Cub Cadet OHV |
| Engine displacement: | 382 cm³ |
| Drive: | Transmatic |
| Cutting height adjustment: | 5 positions |
| Model no.: | 13B726HD603 |
| Price: | - |



| LR1 MS76 | |
|----------------------------|----------------|
| Cutting width: | 76 cm |
| Lawn area (rec.): | 3.000 m²/h |
| Collecting volume: | Optional 115 l |
| Engine: | Cub Cadet OHV |
| Engine displacement: | 382 cm³ |
| Drive: | Transmatic |
| Cutting height adjustment: | 5 positions |
| Model no.: | 13B726JD603 |
| Price: | - |

THE SIZE YOU
NEED WITH THE
POWER YOU WANT

The Cub Cadet MINI-RIDER LR2 delivers all the strength, durability and cutting performance of larger rider models; but in a more compact design. An even more powerful engine with auto-choke, premium hydrostatic transmission and the exclusive steering wheel system gives you optimum control while in operation.



LR2 NR76

| | |
|----------------------------|----------------|
| Cutting width: | 76 cm |
| Lawn area (rec.): | 2.500 m²/h |
| Collecting volume: | Standard 200 l |
| Engine: | Cub Cadet OHV |
| Engine displacement: | 439 cm³ |
| Drive: | Hydrostatic |
| Cutting height adjustment: | 5 positions |
| Model no.: | 13AB21HD603 |
| Price: | - |



LR2 NS76

| | |
|----------------------------|----------------|
| Cutting width: | 76 cm |
| Lawn area (rec.): | 3.000 m²/h |
| Collecting volume: | Optional 115 l |
| Engine: | Cub Cadet OHV |
| Engine displacement: | 439 cm³ |
| Drive: | Hydrostatic |
| Cutting height adjustment: | 5 positions |
| Model no.: | 13AB21JD603 |
| Price: | - |



LR2 ES76

| | |
|----------------------------|-----------------------------------|
| Cutting width: | 76 cm |
| Lawn area (rec.): | 3.000 m²/h |
| Collecting volume: | Optional 115 l |
| Engine: | Cub Cadet 56 V / 30 Ah / 1.500 Wh |
| Output Watts: | 3,0 kW |
| Drive: | Electric drive |
| Cutting height adjustment: | 5 positions |
| Model no.: | 33BA27JD603 |
| Price: | - |

MOWING
TIME
60 MIN*
4 HOURS
CHARGING
TIME

*Deviations are possible
depending on lawn area



INTELLIGENT PARKING ASSISTANCE (IPA)

The brand new IPA system makes parking your LR2 in your garage or summer house a breeze. The intelligent system halves the speed of your MINI-RIDER, for reversing more safely and precisely.

REVTEK™ TECHNOLOGY

RevTEK™ – The Reverse Mowing Technology allows you to continue mowing while backing up your MINI-RIDER. As a safety precaution this function must be activated manually. Always make sure that no children or animals are near the mowing area!



LIGHTS

LED lights for safer operation at dawn (except the LR1 MR76 and LR1 MS76).



ERGONOMIC STEERING

The ergonomic steering wheel provides maximum comfort in every situation and even after long working hours.



HYDROSTATIC DRIVE SYSTEM

The LR2 comes complete with a top-quality hydrostatic drive system. With the parking brake on the left and a one-pedal foot control on the right.



COMFORTABLE

Professional seat and steering column for working comfortably.



FRONT BUMPER

Prevent any damage to your MINI-RIDER.



SUPER GRIP PEDALS

Under challenging conditions, the super grip pedals provide maximum grip for safe driving.

MINI-RIDER ACCESSORIES

| | | | |
|--|---|--|-----------------------------------|
| | MULCH KIT/DEFLECTOR | | |
| | Mulch Kit/deflector with blade for 76 cm decks | | Mod. no.: 196-334-600 Price: - |
| | Mulch Kit/deflector incl. blade for 60 cm decks | | Mod. no.: 196-707-678 Price: - |
| | | | |
| | TWIN BAGGER | | |
| | 115 litres, for 76 cm decks | | Mod. no.: 19A30014OEM Price: - |
| | REAR HITCH | | |
| | Rear hitch for LR series with side discharge | | Mod. no.: 196-397-000 Price: - |
| | Rear hitch for LR series with rear discharge | | Mod. no.: 196-398-000 Price: - |
| | | | |

LR2
FORCE SERIES

| LR1 MR76 | | LR1 MS76 | |
|-------------------------------------|---|---|---|
| ENGINE | | | |
| Engine type | Cub Cadet OHV | Cub Cadet OHV | |
| Engine displacement | 382 cm³ | 382 cm³ | |
| Rated power | 7,4 kW / 2.700 min ⁻¹ | 7,9 kW / 2.900 min ⁻¹ | |
| Cylinders | Single | Single | |
| Tank volume <i>(capacity)</i> | 4,9 l | 4,9 l | |
| Lubrication | Fully pressurized automotive-style oil pump with spin-on oil filter | | Fully pressurized automotive-style oil pump with spin-on oil filter |
| DRIVE SYSTEM | | | |
| Transmission | Transmatic | Transmatic | |
| Speeds | 6 (f/r), shift-on-the-go | 6 (f/r), shift-on-the-go | |
| Control | Foot pedal control with lever for manual pre-selection | Foot pedal control with lever for manual pre-selection | |
| CUTTING SYSTEM | | | |
| Lawn area <i>(rec./up to)</i> | 2.500 m²/h | 3.000 m²/h | |
| Cutting width | 76 cm | 76 cm | |
| Cutting height <i>(min–max)</i> | 38–95 mm | 38–95 mm | |
| Cutting options | 3-in-1 option | 2-in-1-option | |
| Number of blades | 1 | 1 | |
| Deck engagement | Manual lever control | Manual lever control | |
| Deck height positions | 5 positions | 5 positions | |
| Wash nozzle/Mulch Kit | Standard/Optional | Standard/Optional | |
| DISCHARGE SYSTEM | | | |
| Bag <i>(capacity)/accessory no.</i> | Standard 200 l/– | Optional 115 l/(19A30014OEM) | |
| Bag lever/Hardtop | 2 grips/Hardtop | –/– | |
| Bag fill indicator/grass deflector | Standard/Optional | –/Standard | |
| FRAME | | | |
| Front axle | Steel | Steel | |
| Front bumper | Standard | Standard | |
| Turning radius | 46 cm | 46 cm | |
| Wheel size <i>(f/r in inch)</i> | 13 x 5 / 16 x 6,5 | 13 x 5 / 16 x 6,5 | |
| Wheel bearings | Sleeve bearings | Sleeve bearings | |
| Frame | Easy entry frame | Easy entry frame | |
| WHEELS | | | |
| Battery | 12V, 135CCA, AGM | 12V, 135CCA, AGM | |
| Headlights | – | – | |
| COMFORT | | | |
| Seat type | Comfort Seat | Comfort Seat | |
| Seat adjustment | Tool-less | Tool-less | |
| Steering wheel | Standard | Standard | |
| Mow in reverse <i>(RevTEK™)</i> | Standard | Standard | |
| Battery charger | (196-967-678) | (196-967-678) | |
| DIMENSIONS | | | |
| LpA/LwA/LwAg <i>(dB)</i> | 88/98/100 | 88/98/100 | |
| Vibration value body/K-factor | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² | |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² | |
| Dimensions <i>(L/W/H)</i> | 225 cm / 86 cm / 112 cm | 157 cm / 85 cm / 112 cm | |
| Net weight | 145 kg | 127 kg | |
| PRICE | | | |
| Model number | 13B726HD603 | 13B726JD603 | |
| EAN |  |  | |
| Price | – | – | |

| LR2 NR76 | | LR2 NS76 | | LR2 ES76 | |
|-------------------------------------|---|----------|---|----------|---|
| ENGINE | | | | | |
| Engine type | Cub Cadet OHV | | Cub Cadet OHV | | Cub Cadet 56 V / 30 Ah / 1.500 Wh |
| Engine displacement | 439 cm³ | | 439 cm³ | | – |
| Rated power | 8,1 kW / 2.700 min ⁻¹ | | 8,6 kW / 2.950 min ⁻¹ | | 3,0 kW / 2.083 min ⁻¹ |
| Cylinders | Single | | Single | | – |
| Tank volume <i>(capacity)</i> | 4,9 l | | 4,9 l | | – |
| Lubrication | Fully pressurized automotive-style oil pump with spin-on oil filter | | Fully pressurized automotive-style oil pump with spin-on oil filter | | – |
| DRIVE SYSTEM | | | | | |
| Transmission | Hydrostatic | | Hydrostatic | | Electric drive |
| Speeds | Stepless | | Stepless | | Variable |
| Control | Foot pedal control | | Foot pedal control | | Foot pedal control |
| CUTTING SYSTEM | | | | | |
| Lawn area <i>(rec./up to)</i> | 2.500 m²/h | | 3.000 m²/h | | 3.000 m²/h |
| Cutting width | 76 cm | | 76 cm | | 76 cm |
| Cutting height <i>(min–max)</i> | 38–95 mm | | 38–95 mm | | 38–95 mm |
| Cutting options | 3-in-1 option | | 2-in-1 option | | 2-in-1 option |
| Number of blades | 1 | | 1 | | 1 |
| Deck engagement | Manual lever control | | Manual lever control | | Electric PTO |
| Deck height positions | 5 positions | | 5 positions | | 5 positions |
| Wash nozzle/Mulch Kit | Standard/Optional | | Standard/Optional | | –/Optional |
| DISCHARGE SYSTEM | | | | | |
| Bag <i>(capacity)/accessory no.</i> | Standard 200 l/– | | Optional 115 l/(19A30014OEM) | | Optional 115 l/(19A30014OEM) |
| Bag lever/Hardtop | 2 grips/Hardtop | | –/– | | –/– |
| Bag fill indicator/grass deflector | Standard/Optional | | –/Standard | | –/Standard |
| FRAME | | | | | |
| Front axle | Steel | | Steel | | Steel |
| Front bumper | Standard | | Standard | | Standard, blue |
| Turning radius | 46 cm | | 46 cm | | 46 cm |
| Wheel size <i>(f/r in inch)</i> | 13 x 5 / 16 x 6,5 | | 13 x 5 / 16 x 6,5 | | 13 x 5 / 16 x 6,5 |
| Wheel bearings | Sleeve bearings | | Sleeve bearings | | Sleeve bearings |
| Frame | Easy entry frame | | Easy entry frame | | Easy entry frame |
| WHEELS | | | | | |
| Battery | 12V, 135CCA, AGM | | 12V, 135CCA, AGM | | – |
| Headlights | LED | | LED | | LED |
| COMFORT | | | | | |
| Seat type | Deluxe High Comfort Seat | | Deluxe High Comfort Seat | | Cut & Sew, high back rest |
| Seat adjustment | Tool-less | | Tool-less | | Tool-less |
| Steering wheel | Standard | | Standard | | Standard |
| Mow in reverse <i>(RevTEK™)</i> | Standard | | Standard | | Standard |
| Battery charger | (196-967-678) | | (196-967-678) | | – |
| DIMENSIONS | | | | | |
| LpA/LwA/LwAg <i>(dB)</i> | 88/98/100 | | 88/98/100 | | n.a./n.a./n.a. |
| Vibration value body/K-factor | 1,0 / 0,5 m/s² | | 1,0 / 0,5 m/s² | | 1,0 / 0,5 m/s² |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | | 5,0 / 1,5 m/s² | | 5,0 / 1,5 m/s² |
| Dimensions <i>(L/W/H)</i> | 225 cm / 86 cm / 112 cm | | 157 cm / 85 cm / 112 cm | | 170 cm / 97 cm / 88 cm |
| Net weight | 172 kg | | 127 kg | | 163 kg |
| PRICE | | | | | |
| Model number | 13AB21HD603 | | 13AB21JD603 | | 33BA27JD603 |
| EAN |  | |  | |  |
| Price | - | | - | | - |

COMFORTABLE SEAT WITH HIGH BACKREST FOR ALL LT MODELS
Mow frequently? For many hours? Then you know how important it is to sit comfortably. The high backrest supports an upright posture, making it far more comfortable.

LT1
FORCE SERIES



CUTTING HEIGHT ADJUSTMENT
5-position height adjustment to easily change the cutting height (30–95 mm).



CENTRAL REAR DISCHARGE
All our rear discharge tractors are designed to transport grass clippings into the grass catcher with optimal efficiency. All LT Series rear discharge models feature a grass catcher made of durable fabric for flexibility and have an air passage to guarantee air flow and perfect collection. The hard top controls dust and reduces noise. The telescopic handle allows you to empty the grass catcher right from the driver's seat.

COMFORT STEERING WHEEL
A 3-spoke soft grip steering wheel is standard on all LT2 and LT3 tractors.

ENJOYABLE EXPERIENCE

Cub Cadet LT Series lawn tractors are extraordinarily versatile. They excel when it comes to covering large areas quickly thanks to the oversized grass catcher – and even more with side discharge, eliminating the need to stop and empty the catcher. Thanks to the user-friendly cutting height adjustment, the LT Series achieves optimum cutting results – even on difficult ground.



STEEL FRAME
All tractor frames are made of fully welded and powder-coated rugged steel.



FLOATING STEEL OR CAST IRON FRONT AXLE
Keeping all four wheels on the ground, however uneven the surface.



PIVOTING ONE-PIECE HOOD
The entire engine hood can be folded up within seconds without tools, for easy maintenance.



TRANSMATIC TRANSMISSION

Allows shift-on-the-go speed control. Simply choose the driving direction, set the desired basic speed with the speed shift lever on the dashboard and release the brake/clutch pedal. Push the pedal to slow down or press it all the way forward to stop. Releasing the brake pedal automatically brings the tractor back to a preset speed.



| | |
|----------------------------|---------------|
| LT1 NR92 | |
| Cutting width: | 92 cm |
| Area performance (rec.): | 3.500 m²/h |
| Collecting volume: | 240 l |
| Engine: | Cub Cadet OHV |
| Engine displacement: | 439 cm³ |
| Drive: | Transmatic |
| Cutting height adjustment: | 5 positions |
| Model no.: | 13AB77DE603 |
| Price: | - |



| | |
|----------------------------|----------------|
| LT1 NS96 | |
| Cutting width: | 96 cm |
| Area performance (rec.): | 4.000 m²/h |
| Collecting volume: | Optional 200 l |
| Engine: | Cub Cadet OHV |
| Engine displacement: | 439 cm³ |
| Drive: | Transmatic |
| Cutting height adjustment: | 5 positions |
| Model no.: | 13AB77DF603 |
| Price: | - |

LT2
FORCE SERIES
LT3
FORCE SERIES



Cub Cadet
ENGINES

Our LT lawn tractors are equipped with a powerful and reliable Cub Cadet engine – developed in the USA.



| | |
|----------------------------|------------------|
| LT2 NR92 | |
| Cutting width: | 92 cm |
| Lawn area (rec.): | 3.500 m²/h |
| Collecting volume: | 240 l |
| Engine: | Cub Cadet OHV |
| Engine displacement: | 439 cm³ |
| Drive: | Hand-hydrostatic |
| Cutting height adjustment: | 5 positions |
| Model no.: | 13BB71DE603 |
| Price: | - |



HYDROSTATIC TRANSMISSION

Impresses with its modern technology. It features a self-lubricating hydro pump for minimum maintenance and maximum durability. The hydrostatic transmission also stands out for its velocity control as well as continual forward and reverse speeds. No clutching or shifting required. You can drive with millimeter accuracy, and very gently. The XT Series lawn tractors are foot-pedal controlled. The LT Series tractors are controlled by either a hand lever (side discharger tractors) or a foot pedal (rear discharger tractors).

COMFORT STEERING WHEEL
A 3-spoke soft grip steering wheel is standard on all LT2 and LT3 tractors.

COMFORTABLE SEAT WITH HIGH BACKREST FOR ALL LT MODELS

REVTEK™ TECHNOLOGY
Reserve mowing technology. Allows you to cut while in reverse. Available with LT3 PR105 & LT3 PS107.



| | |
|----------------------------|------------------|
| LT2 NS96 | |
| Cutting width: | 96 cm |
| Lawn area (rec.): | 4.000 m²/h |
| Collecting volume: | Optional 200 l |
| Engine: | Cub Cadet OHV |
| Engine displacement: | 439 cm³ |
| Drive: | Hand-hydrostatic |
| Cutting height adjustment: | 5 positions |
| Model no.: | 13BB79DF603 |
| Price: | - |



| | |
|----------------------------|-------------------------------------|
| LT3 PR105 | |
| Cutting width: | 105 cm |
| Lawn area (rec.): | 4.500 m²/h |
| Collecting volume: | 240 l |
| Engine: | Cub Cadet OHV, V-TWIN dual cylinder |
| Engine displacement: | 679 cm³ |
| Drive: | Hydrostatic |
| Cutting height adjustment: | 5 positions |
| Model no.: | 13BJ71DN603 |
| Price: | - |



| | |
|----------------------------|-------------------------------------|
| LT3 PS107 | |
| Cutting width: | 107 cm |
| Lawn area (rec.): | 5.500 m²/h |
| Collecting volume: | Optional 200 l |
| Engine: | Cub Cadet OHV, V-TWIN dual cylinder |
| Engine displacement: | 679 cm³ |
| Drive: | Hydrostatic |
| Cutting height adjustment: | 5 positions |
| Model no.: | 13BJ79DG603 |
| Price: | - |

| | LT1 NR92 | LT1 NS96 | LT2 NR92 |
|--------------------------------------|--|--|----------------------------------|
| ENGINE | | | |
| Engine type | Cub Cadet OHV | Cub Cadet OHV | Cub Cadet OHV |
| Engine displacement | 439 cm³ | 439 cm³ | 439 cm³ |
| Rated power | 8,1 kW / 2.700 min ⁻¹ | 8,3 kW / 2.800 min ⁻¹ | 8,1 kW / 2.700 min ⁻¹ |
| Cylinders | Single | Single | Single |
| Tank volume <i>(capacity)</i> | 3,8 l | 3,8 l | 3,8 l |
| DRIVE SYSTEM | | | |
| Transmission | Transmatic | Transmatic | Hand-hydrostatic |
| Speeds | 6 (f/r), shift-on-the-go | 6 (f/r), shift-on-the-go | Infinitely variable (f/r) |
| Control | Foot pedal control with lever for manual pre-selection | Foot pedal control with lever for manual pre-selection | Foot pedal control |
| Cruise control | – | – | – |
| CUTTING SYSTEM | | | |
| Lawn area <i>(rec./up to)</i> | 3.500 m²/h | 4.000 m²/h | 3.500 m²/h |
| Cutting width | 92 cm | 96 cm | 92 cm |
| Cutting height <i>(min-max)</i> | 30–95 mm | 30–95 mm | 30–95 mm |
| Number of blades | 2 | 2 | 2 |
| Deck engagement | Manual lever control | Manual lever control | Manual lever control |
| Deck height positions | 5 positions | 5 positions | 5 positions |
| Deck wheels | – | – | – |
| Wash nozzle/Mulch Kit | –/(196-749A678) | –/optional (OEM-190A116) | –/optional (196-749A678) |
| DISCHARGE SYSTEM | | | |
| Bag <i>(capacity)</i> /accessory no. | 240 l/– | Optional 200 l/(OEM-190-180A) | 240 l/– |
| Bag lever/hardtop | Telescopic handle/PVC hardtop | –/– | Telescopic handle/PVC hardtop |
| Bag fill indicator/grass deflector | –/(196-750A678) | –/Standard | –/optional (196-750A678) |
| FRAME | | | |
| Front axle | Steel | Steel | Steel |
| Front bumper | optional (OEM-190-679) | optional (OEM-190-679) | optional (OEM-190-679) |
| Turning radius | 46 cm | 46 cm | 46 cm |
| Wheel size <i>(f/r in inch)</i> | 15 x 6 / 18 x 9,5 | 15 x 6 / 20 x 8 | 15 x 6 / 18 x 9,5 |
| Wheel bearings | Sleeve bearings | Sleeve bearings | Sleeve bearings |
| Frame | Easy entry frame | Easy entry frame | Easy entry frame |
| Headlights | Standard | Standard | Standard |
| COMFORT | | | |
| Seat type | Comfort, high back | Comfort, high back | Comfort, high back |
| Seat adjustment | Tool-less | Tool-less | Tool-less |
| Steering wheel | Standard | Standard | Soft-Grip |
| Toolbox/Cupholder | –/– | –/– | –/– |
| Mow in reverse <i>(RevTEK™)</i> | – | – | – |
| Battery charger | optional (196-967-678) | optional (196-967-678) | optional (196-967-678) |
| DIMENSIONS | | | |
| LpA/LwA/LwAg <i>(dB)</i> | 88/98/100 | 88/98/100 | 88/98/100 |
| Vibration value body/K-factor | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions <i>(L/W/H)</i> | 225 cm / 99 cm / 103 cm | 170 cm / 107 cm / 100 cm | 225 cm / 99 cm / 103 cm |
| Net weight | 195 kg | 150 kg | 195 kg |
| PRICE | | | |
| Model number | 13AB77DE603 | 13AB77DF603 | 13BB71DE603 |
| EAN | 4 008423 891829 | 4 008423 891836 | 4 008423 891812 |
| Price | - | - | - |

| | LT2 NS96 | LT3 PR105 | LT3 PS107 |
|--------------------------------------|--|-----------------------------------|--|
| ENGINE | | | |
| Engine type | Cub Cadet OHV | Cub Cadet OHV | Cub Cadet OHV |
| Engine displacement | 439 cm³ | 679 cm³ | 679 cm³ |
| Rated power | 8,3 kW / 2.800 min ⁻¹ | 12,7 kW / 2.700 min ⁻¹ | 12,3 kW / 2.600 min ⁻¹ |
| Cylinders | Single | V-TWIN dual cylinder | V-TWIN dual cylinder |
| Tank volume <i>(capacity)</i> | 3,8 l | 3,8 l | 3,8 l |
| DRIVE SYSTEM | | | |
| Transmission | Hand-hydrostatic | Hydrostatic | Hydrostatic |
| Speeds | Infinitely variable (f/r) | Infinitely variable (f/r) | Infinitely variable (f/r) |
| Control | Manual lever control | Foot pedal control | Manual lever control |
| Cruise control | – | – | – |
| CUTTING SYSTEM | | | |
| Lawn area <i>(rec./up to)</i> | 4.000 m²/h | 4.500 m²/h | 5.500 m²/h |
| Cutting width | 96 cm | 105 cm | 107 cm |
| Cutting height <i>(min-max)</i> | 30–95 mm | 30–95 mm | 30–95 mm |
| Number of blades | 2 | 2 | 2 |
| Deck engagement | Manual lever control | Manual lever control | Manual lever control |
| Deck height positions | 5 positions | 5 positions | 5 positions |
| Deck wheels | – | 2 | 2 |
| Wash nozzle/Mulch Kit | –/optional (OEM-190A116) | Standard/optional (196-749A678) | Standard/Standard |
| DISCHARGE SYSTEM | | | |
| Bag <i>(capacity)</i> /accessory no. | Optional 200 l/optional (OEM-190-180A) | 240 l/– | Optional 200 l/optional (OEM-190-180A) |
| Bag lever/hardtop | –/– | Telescopic handle/PVC hardtop | –/– |
| Bag fill indicator/grass deflector | –/Standard | –/optional (196-750A678) | –/Standard |
| FRAME | | | |
| Front axle | steel | Heavy-duty cast-iron | Heavy-duty cast-iron |
| Front bumper | optional (OEM-190-679) | Standard | Standard |
| Turning radius | 46 cm | 46 cm | 46 cm |
| Wheel size <i>(f/r in inch)</i> | 15 x 6 / 20 x 8 | 15 x 6 / 18 x 9,5 | 15 x 6 / 20 x 8 |
| Wheel bearings | Sleeve bearings | Sleeve bearings | Sleeve bearings |
| Frame | Easy entry frame | Easy entry frame | Easy entry frame |
| Headlights | Standard | Standard | Standard |
| COMFORT | | | |
| Seat type | Comfort, high back | Comfort, high back | Comfort, high back |
| Seat adjustment | Tool-less | Tool-less | Tool-less |
| Steering wheel | Soft-Grip | Soft-Grip | Soft-Grip |
| Toolbox/Cupholder | –/– | –/– | –/– |
| Mow in reverse <i>(RevTEK™)</i> | – | Standard | Standard |
| Battery charger | optional (196-967-678) | optional (196-967-678) | optional (196-967-678) |
| DIMENSIONS | | | |
| LpA/LwA/LwAg <i>(dB)</i> | 88/98/100 | 88/98/100 | 88/98/100 |
| Vibration value body/K-factor | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions <i>(L/W/H)</i> | 170 cm / 107 cm / 100 cm | 225 cm / 110 cm / 103 cm | 170 cm / 115 cm / 100 cm |
| Net weight | 150 kg | 198 kg | 175 kg |
| PRICE | | | |
| Model number | 13BB79DF603 | 13BJ71DN603 | 13BJ79DG603 |
| EAN | 4 008423 891843 | 4 008423 899863 | 4 008423 899870 |
| Price | - | - | - |

THE TOP 5 OF THE FEATURES!

POWER LIKE NEVER BEFORE!

XT
ENDURO SERIES™



1. MARKET-LEADING CUTTING, COLLECTING & MULCHING SYSTEM

Optimize your mowing results in minimum time.



Learn more



2. THE SMALLEST TURNING RADIUS ON THE MARKET

Unbeatable efficiency even in confined spaces thanks to innovative TIGHT TURN Technology.



3. ULTRA-STURDY, CORROSIONRESISTANT FRAME

Ultra-rigid frame for top durability.



4. PERFECTLY MATCHED TRANSMISSION AND ENGINE POWER

Optimal drive power and the strongest engine in its class.



5. ULTRA-RELIABLE V-BELT DESIGN

Thanks to reduced fan belt tension and ingenious, perfect fan belt guidance without twisted fan belts, the Cub Cadet mowing deck operates with impressive stability and endurance. The XT2 QS117 and XT3 QS137 tractors are also equipped with a welded mowing deck, which is even sturdier and more durable.

THE XT ENDURO SERIES AT A GLANCE

XT1
ENDURO SERIES™



XT2
ENDURO SERIES™

XT3
ENDURO SERIES™

- A MARKET-LEADING CUTTING, COLLECTING AND MULCHING SYSTEM**
- Thanks to the all-new grass cuttings transport system and the rear-discharge mowing decks.
 - With twice the grass-catching of previous Cub Cadet lawn tractors.
 - Best side discharge grass catcher on the market.
 - Push-button switch-on.

320 LITRE GRASS CATCHER

360 LITRE GRASS CATCHER

**HYDROSTATIC
V-BELT**




HYDROSTATIC POWER TRANSMISSION
Jerk-free drive system – simply press the pedal and drive

POWERFUL CUB CADET ENGINE
high performance and reliable – developed in the USA
(XT1 OS96, XT1 OS107, XT1 OR95, XT1 OR106)

EFFICIENT CUB CADET V-TWIN ENGINE
2-cylinder engine produced in house
(XT2 PR106, XT2 PS 117)
KAWASAKI V-TWIN ENGINE
(XT2 PR95, XT2 QR106, XT2 PS107, XT2 QS117)

KAWASAKI V-TWIN ENGINE
2-cylinder engine for difficult terrain, ultra-smooth running and low fuel consumption (XT3 QS127, XT3 QS137, XT3 QR106)

EASIEST STEERING SYSTEM ON THE MARKET

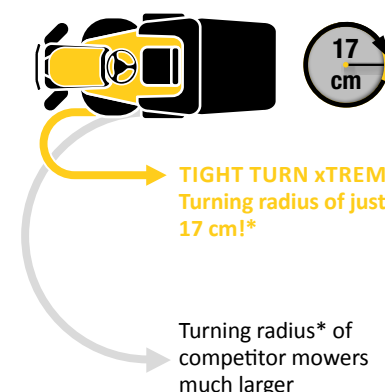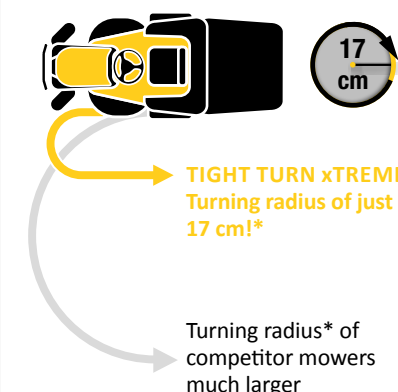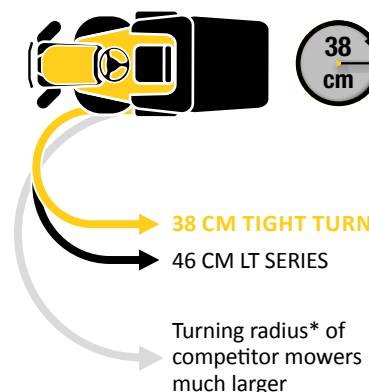

ELECTRIC BAG LIFT available as accessory for all rear discharge models from 2018 onwards

SOLID, WELDED MOWING DECK for XT2 QS117 & XT3 QS137

12V MULTI-FUNCTION CHARGING SOCKET FOR THE REAR DISCHARGE MODELS

ANTI-DUST GRASS CATCHER SYSTEM
AVAILABLE AS AN OPTIONAL EXTRA

ANTI-DUST GRASS CATCHER SYSTEM
AVAILABLE AS AN OPTIONAL EXTRA

ANTI-DUST SYSTEM
Rear discharge with multi-layer dust apron included in accessories. The apron protects against flying grass and dirt

ALL-GROUND TRACTION SYSTEM
Perfect traction even on heavy ground – thanks to mechanical differential lock

*The turning radius of a lawn tractor involves marking the position of the left rear wheel while the tractor completes a 360-degree circle (on plain ground). Now you measure the distance between the mark and the actual position of the left rear wheel again. Half this distance is the turning radius – included in all product specifications.

XT1™
ENDURO SERIES™



Selected XT lawn tractors are equipped with a powerful and reliable Cub Cadet engine – developed in the USA.



UNBELIEVABLE POWER AND EFFICIENCY

The Cub Cadet XT series, part of the latest generation of garden tractors, sets new standards for power, performance and robust quality – offering you the ultimate power package. XT1 lawn tractors are ideally equipped for mowing, collecting and transporting clippings and can also be expanded with a special range of accessories.



Learn more



DIAGONAL ADJUSTABLE SEAT
Individually adaptable – pure comfort for all users.



PUSH BUTTON BLADE START
Use the drive only when in use – that's more efficient and safer.



MECHANICALLY SUPPORTED CUTTING HEIGHT ADJUSTMENT
Quickly and easily select the perfect setting.



HYDROSTATIC POWER TRANSMISSION
Jerk-free, smooth starting for precise mowing.



XT1 OS96

| | |
|----------------------------|----------------|
| Cutting width: | 96 cm |
| Lawn area (rec.): | 6.000 m²/h |
| Collecting volume: | Optional 200 l |
| Engine: | Cub Cadet |
| Engine displacement: | 547 cm³ |
| Drive: | Hydrostatic |
| Cutting height adjustment: | 12 positions |
| Model no.: | 13A8A1TF603 |
| Price: | - |



XT1 OS107

| | |
|----------------------------|----------------|
| Cutting width: | 107 cm |
| Lawn area (rec.): | 8.000 m²/h |
| Collecting volume: | Optional 200 l |
| Engine: | Cub Cadet |
| Engine displacement: | 547 cm³ |
| Drive: | Hydrostatic |
| Cutting height adjustment: | 12 positions |
| Model no.: | 13A8A1TS603 |
| Price: | - |



XT1 OR95

| | |
|----------------------------|--------------|
| Cutting width: | 95 cm |
| Lawn area (rec.): | 5.500 m²/h |
| Collecting volume: | 320 l |
| Engine: | Cub Cadet |
| Engine displacement: | 547 cm³ |
| Drive: | Hydrostatic |
| Cutting height adjustment: | 12 positions |
| Model no.: | 13A8A1TB603 |
| Price: | - |




XT1 OR106

| | |
|----------------------------|--------------|
| Cutting width: | 106 cm |
| Lawn area (rec.): | 7.500 m²/h |
| Collecting volume: | 320 l |
| Engine: | Cub Cadet |
| Engine displacement: | 547 cm³ |
| Drive: | Hydrostatic |
| Cutting height adjustment: | 12 positions |
| Model no.: | 13A8A1TR603 |
| Price: | - |

Cub Cadet® TIGHT TURN XTREME

Just 17 cm turning radius thanks to TIGHT TURN XTREME.



POWERFUL TWO-CYLINDER ENGINES
All petrol-powered XT2 models are equipped with efficient Cub Cadet, or Kawasaki two-cylinder engines.



GRASS CATCHER WITH ELECTRIC BAG LIFT
One touch of a button – and the grass bag is lifting up. Can be retrofitted to all XT rear discharge models from 2018 onwards.

POWER FOR GREATER CHALLENGES

The Cub Cadet XT2 offers you an even higher level of power, control functions and durability. XT2 lawn tractors are ideal for working on tough terrain, transporting and using additional accessories, whatever the season.

Powered by
Kawasaki



XT2 PR95

| | |
|----------------------------|--------------------------------|
| Cutting width: | 95 cm |
| Lawn area (rec.): | 6.000 m²/h |
| Collecting volume: | 320 l |
| Engine: | Kawasaki, V-TWIN dual cylinder |
| Engine displacement: | 603 cm³ |
| Drive: | Hydrostatic |
| Cutting height adjustment: | 12 positions |
| Model no.: | 13AGA1TB603 |
| Price: | - |

POWERED BY
Cub Cadet



XT2 PR106

| | |
|----------------------------|---------------------------------|
| Cutting width: | 106 cm |
| Lawn area (rec.): | 8.000 m²/h |
| Collecting volume: | 320 |
| Engine: | Cub Cadet, V-TWIN dual cylinder |
| Engine displacement: | 679 cm³ |
| Drive: | Hydrostatic |
| Cutting height adjustment: | 12 positions |
| Model no.: | 13AJA1TR603 |
| Price: | - |

Powered by
Kawasaki



XT2 QR106

| | |
|----------------------------|--------------------------------|
| Cutting width: | 106 cm |
| Lawn area (rec.): | 8.000 m²/h |
| Collecting volume: | 320 l |
| Engine: | Kawasaki, V-TWIN dual cylinder |
| Engine displacement: | 726 cm³ |
| Drive: | Hydrostatic |
| Cutting height adjustment: | 12 positions |
| Model no.: | 13AFA1TR603 |
| Price: | - |

Powered by
Kawasaki



XT2 PS107

| | |
|----------------------------|--------------------------------|
| Cutting width: | 107 cm |
| Lawn area (rec.): | 8.500 m²/h |
| Collecting volume: | Optional 200 l |
| Engine: | Kawasaki, V-TWIN dual cylinder |
| Engine displacement: | 603 cm³ |
| Drive: | Hydrostatic |
| Cutting height adjustment: | 12 positions |
| Model no.: | 13AGA1TS603 |
| Price: | - |

POWERED BY
Cub Cadet



XT2 PS117

| | |
|----------------------------|---------------------------------|
| Cutting width: | 117 cm |
| Lawn area (rec.): | 9.000 m²/h |
| Collecting volume: | Optional 200 l |
| Engine: | Cub Cadet, V-TWIN dual cylinder |
| Engine displacement: | 679 cm³ |
| Drive: | Hydrostatic |
| Cutting height adjustment: | 12 positions |
| Model no.: | 13AJA1TT603 |
| Price: | - |

Powered by
Kawasaki



XT2 QS117

| | |
|----------------------------|--------------------------------|
| Cutting width: | 117 cm, welded mowing deck |
| Lawn area (rec.): | 9.000 m²/h |
| Collecting volume: | Optional 200 l |
| Engine: | Kawasaki, V-TWIN dual cylinder |
| Engine displacement: | 726 cm³ |
| Drive: | Hydrostatic |
| Cutting height adjustment: | 12 positions |
| Model no.: | 13AFA1TN603 |
| Price: | - |

NEW

**Li-Ion
ELECTRIC**



XT2 ES107

| | |
|----------------------------|-----------------------------------|
| Cutting width: | 107 cm |
| Lawn area (rec.): | 8.000 m²/h |
| Collecting volume: | Optional 200 l |
| Engine: | Cub Cadet 56 V / 60 Ah / 3.000 Wh |
| Output Watts: | 3,0 kW |
| Drive: | Electric drive |
| Cutting height adjustment: | 12 positions |
| Model no.: | 33ABA7ES603 |
| Price: | - |

*Deviations are possible depending on lawn area
Image shows US model



MASSIVE, WELDED MOWING UNIT
For high durability and absolute robustness with the XT2 QS117.



Learn more

XT2
ENDURO SERIES™


XT3™

ENDURO SERIES™

Cub Cadet®

TIGHT TURN xTREME

Just 17 cm turning radius thanks to TIGHT TURN xTREME.



Learn more

Cub Cadet®

ALL-GROUND TRACTION

Optimum traction, however tough the terrain – thanks to the mechanical differential lock.

MAXIMUM STRENGTH AND POWER FOR THE TOUGHEST TASK

Designed to meet the toughest demands, driven by true power packages and equipped with ultra-strong components – the Cub Cadet XT3 are the ultimate lawn tractors. The XT3 have plenty of power to mow even high, thick grass to carry larger loads and for extra heavy tillage accessories.



LARGEST GRASS CATCHER ON THE MARKET
Vast 360 litre capacity ensures maximum efficiency.



STRONG V-TWIN KAWASAKI ENGINE
Two-cylinder engine for demanding terrain with particularly quiet running and low fuel consumption.



ANTI-DUST SYSTEM
Rear discharge with multi-layer dust apron included in the equipment, protects against swirling grass and dirt.



MASSIVE, WELDED MOWING UNIT
For high durability and absolute robustness with the XT3 QS137.



XT3 QR106

| | |
|----------------------------|---|
| Cutting width: | 106 cm |
| Lawn area (rec.): | 8.000 m²/h |
| Collecting volume: | 360 l, with Anti dust system |
| Engine: | Kawasaki, V-TWIN dual cylinder |
| Engine displacement: | 726 cm³ |
| Drive: | Hydrostatic, All-Ground Traction System |
| Cutting height adjustment: | 12 positions |
| Model no.: | 13AFASTR603 |
| Price: | - |



XT3 QS127

| | |
|----------------------------|---|
| Cutting width: | 127 cm |
| Lawn area (rec.): | 10.000 m²/h |
| Collecting volume: | Optional 210 l |
| Engine: | Kawasaki, V-TWIN dual cylinder |
| Engine displacement: | 726 cm³ |
| Drive: | Hydrostatic, All-Ground Traction System |
| Cutting height adjustment: | 12 positions |
| Model no.: | 14AFASTQ603 |
| Price: | - |



XT3 QS137

| | |
|----------------------------|---|
| Cutting width: | 137 cm, welded mowing deck |
| Lawn area (rec.): | 11.000 m²/h |
| Collecting volume: | Optional 210 l |
| Engine: | Kawasaki, V-TWIN dual cylinder |
| Engine displacement: | 726 cm³ |
| Drive: | Hydrostatic, All-Ground Traction System |
| Cutting height adjustment: | 12 positions |
| Model no.: | 14AFASTM603 |
| Price: | - |


XT1 OS96

XT1 OS107

| ENGINE | | |
|---------------------------------------|---|---|
| Engine type | Cub Cadet | Cub Cadet |
| Engine displacement | 547 cm³ | 547 cm³ |
| Rated power | 9,0 kW / 2.300 min ⁻¹ | 6,6 kW / 2.250 min ⁻¹ |
| Cylinders | Single | Single |
| Tank volume (<i>capacity</i>) | 11,4 l | 11,4 l |
| DRIVE SYSTEM | | |
| Transmission | Hydrostatic | Hydrostatic |
| Speeds | Infinitely variable (f/r) | Infinitely variable (f/r) |
| Control | Foot pedal control | Foot pedal control |
| Cruise control | Standard | Standard |
| CUTTING SYSTEM | | |
| Lawn area (<i>rec./up to</i>) | 6.000 m²/h | 8.000 m²/h |
| Cutting width | 96 cm | 107 cm |
| Cutting height (<i>min-max</i>) | 25–100 mm | 25–100 mm |
| Cutting deck | stamped | stamped |
| Number of blades | 2 | 2 |
| Deck engagement | Electric PTO | Electric PTO |
| Deck height positions | 12 positions | 12 positions |
| Deck wheels | 2 balls deck wheels | 2 balls deck wheels |
| Wash nozzle/Mulch Kit/mulching blades | –/Standard/Standard | Standard/Standard/Standard |
| DISCHARGE SYSTEM | | |
| Bag (<i>capacity</i>)/accessory no. | Optional 200 l/(OEMR190-180A) | Optional 200 l/(19A30030100) |
| Bag lever/hardtop | –/– | –/– |
| Bag fill indicator/grass deflector | –/Standard | –/Standard |
| FRAME | | |
| Front axle | Heavy-duty cast-iron | Heavy-duty cast-iron |
| Front bumper | Standard | Standard |
| Turning radius | TIGHT TURN 38 cm | TIGHT TURN 38 cm |
| Wheel size (<i>f/r in inch</i>) | 15 x 6 Turf Saver / 20 x 8 | 15 x 6 Turf Saver / 20 x 8 |
| Wheel bearings | Sleeve bearings | Sleeve bearings |
| Frame | Fully robotically-welded frame | Fully robotically-welded frame |
| ELECTRIC | | |
| Headlights | LED | LED |
| COMFORT | | |
| Seat type | Cut & Sew, high back rest | Cut & Sew, high back rest |
| Seat adjustment | Lever, angled, 10 slide | Lever, angled, 10 slide |
| Steering wheel | Ergonomic with gentle touch | Ergonomic with gentle touch |
| Toolbox/Cupholder | Standard/Standard | Standard/Standard |
| Mow in reverse (<i>RevTEK™</i>) | Standard | Standard |
| DIMENSIONS | | |
| LpA/LwA/LwAg (<i>dB</i>) | 88/98/100 | 88/98/100 |
| Vibration value body / K-factor | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions (<i>L/W/H</i>) | 175 cm / 124 cm / 110 cm | 175 cm / 134 cm / 110 cm |
| Net weight | 195 kg | 195 kg |
| PRICE | | |
| Model number | 13A8A1TF603 | 13A8A1TS603 |
| EAN |  |  |
| Price | - | - |



XT1 OR95

XT1 OR106

| ENGINE | | |
|---------------------------------------|---|---|
| Engine type | Cub Cadet | Cub Cadet |
| Engine displacement | 547 cm³ | 547 cm³ |
| Rated power | 6,2 kW / 2.100 min ⁻¹ | 6,6 kW / 2.250 min ⁻¹ |
| Cylinders | Single | Single |
| Tank volume (<i>capacity</i>) | 11,4 l | 11,4 l |
| DRIVE SYSTEM | | |
| Transmission | Hydrostatic | Hydrostatic |
| Speeds | Infinitely variable (f/r) | Infinitely variable (f/r) |
| Control | Foot pedal control | Foot pedal control |
| Cruise control | Standard | Standard |
| CUTTING SYSTEM | | |
| Lawn area (<i>rec./up to</i>) | 5.500 m²/h | 7.500 m²/h |
| Cutting width | 95 cm | 106 cm |
| Cutting height (<i>min-max</i>) | 25–100 mm | 25–100 mm |
| Cutting deck | stamped | stamped |
| Number of blades | 2 | 2 |
| Deck engagement | Electric PTO | Electric PTO |
| Deck height positions | 12 positions | 12 positions |
| Deck wheels | 2 balls deck wheels | 4 balls deck wheels |
| Wash nozzle/Mulch Kit/mulching blades | Standard/(196-551-000)/(196-561-000) | Standard/(196-550-000)/(196-560-000) |
| DISCHARGE SYSTEM | | |
| Bag (<i>capacity</i>)/accessory no. | 320 l/(196-555-603 Anti-Dust-System) | 320 l/(196-555-603 Anti-Dust-System) |
| Bag lever/hardtop | Rounded ergo telescopic handle/Plastic | Rounded ergo telescopic handle/Plastic |
| Bag fill indicator/grass deflector | Deluxe w Blade Shutoff/(196-552A000) | Deluxe w Blade Shutoff/(196-552A000) |
| FRAME | | |
| Front axle | Heavy-duty cast-iron | Heavy-duty cast-iron |
| Front bumper | Standard | Standard |
| Turning radius | TIGHT TURN 38 cm | TIGHT TURN 38 cm |
| Wheel size (<i>f/r in inch</i>) | 15 x 6 Turf Saver / 18 x 8,5 | 15 x 6 Turf Saver / 18 x 8,5 |
| Wheel bearings | Sleeve bearings | Sleeve bearings |
| Frame | Fully robotically-welded frame | Fully robotically-welded frame |
| ELECTRIC | | |
| Headlights | LED | LED |
| COMFORT | | |
| Seat type | Cut & Sew, high back rest | Cut & Sew, high back rest |
| Seat adjustment | Lever, angled, 10 slide | Lever, angled, 10 slide |
| Steering wheel | Ergonomic with gentle touch | Ergonomic with gentle touch |
| Toolbox/Cupholder | Standard/Standard | Standard/Standard |
| Mow in reverse (<i>RevTEK™</i>) | Standard | Standard |
| DIMENSIONS | | |
| LpA/LwA/LwAg (<i>dB</i>) | 88/98/100 | 88/98/100 |
| Vibration value body / K-factor | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions (<i>L/W/H</i>) | 245 cm / 100 cm / 118 cm | 245 cm / 110 cm / 118 cm |
| Net weight | 235 kg | 258 kg |
| PRICE | | |
| Model number | 13A8A1TB603 | 13A8A1TR603 |
| EAN |  |  |
| Price | - | - |


XT2 PR95

XT2 PR106

| ENGINE | | |
|---------------------------------------|---|---|
| Engine type | Kawasaki | Cub Cadet |
| Engine displacement | 603 cm³ | 679 cm³ |
| Rated power | 9,3 kW / 2.150 min ⁻¹ | 14,9 kW / 2.150 min ⁻¹ |
| Cylinders | V-TWIN dual cylinder | V-TWIN dual cylinder |
| Tank volume (<i>capacity</i>) | 11,4 l | 11,4 l |
| DRIVE SYSTEM | | |
| Transmission | Hydrostatic | Hydrostatic |
| Speeds | Infinitely variable (f/r) | Infinitely variable (f/r) |
| Control | Foot pedal control | Foot pedal control |
| Cruise control | Standard | Standard |
| CUTTING SYSTEM | | |
| Lawn area (<i>rec./up to</i>) | 6.000 m²/h | 8.000 m²/h |
| Cutting width | 95 cm | 106 cm |
| Cutting height (<i>min-max</i>) | 25–100 mm | 25–100 mm |
| Cutting deck | stamped | stamped |
| Number of blades | 2 | 2 |
| Deck engagement | Electric PTO | Electric PTO |
| Deck height positions | 12 positions | 12 positions |
| Deck wheels | 2 balls deck wheels | 4 balls deck wheels |
| Wash nozzle/Mulch Kit/mulching blades | Standard/(196-551-000)/(196-561-000) | Standard/(196-550-000)/(196-560-000) |
| DISCHARGE SYSTEM | | |
| Bag (<i>capacity</i>)/accessory no. | 320 l/(196-555-603 Anti-Dust-System) | 320 l/(Anti-Dust-system 196-553-603) |
| Bag lever/hardtop | Rounded ergo telescopic handle/Plastic | Rounded ergo telescopic handle/Plastic |
| Bag fill indicator/grass deflector | Deluxe w Blade Shutoff/(196-552A000) | Deluxe w Blade Shutoff/(196-552A000) |
| FRAME | | |
| Front axle | Heavy-duty cast-iron | Heavy-duty cast-iron |
| Front bumper | Standard, yellow | Standard, yellow |
| Turning radius | TIGHT TURN xTREME 17 cm | TIGHT TURN xTREME 17 cm |
| Wheel size (<i>f/r in inch</i>) | 15 x 6 Turf Saver / 18 x 8,5 | 15 x 6 Turf Saver / 18 x 8,5 |
| Wheel bearings | Sleeve bearings | Sleeve bearings |
| Frame | Fully robotically-welded frame | Fully robotically-welded frame |
| ELECTRIC | | |
| Headlights | LED | LED |
| COMFORT | | |
| Seat type | Cut & Sew, high back rest | Cut & Sew, high back rest |
| Seat adjustment | Lever, angled, 10 slide | Lever, angled, 10 slide |
| Steering wheel | Ergonomic with gentle touch | Ergonomic with gentle touch |
| Toolbox/Cupholder | Standard/Standard | Standard/Standard |
| Mow in reverse (<i>RevTEK™</i>) | Standard | Standard |
| DIMENSIONS | | |
| LpA/LwA/LwAg (<i>dB</i>) | 88/98/100 | n.a./n.a./n.a. |
| Vibration value body / K-factor | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions (<i>L/W/H</i>) | 250 cm / 100 cm / 118 cm | 250 cm / 110 cm / 118 cm |
| Net weight | 254 kg | 253 kg |
| PRICE | | |
| Model number | 13AGA1TB603 | 13AJA1TR603 |
| EAN |  |  |
| Price | - | - |



XT2 QR106

XT2 PS107

| ENGINE | | |
|---------------------------------------|---|---|
| Engine type | Kawasaki | Kawasaki |
| Engine displacement | 726 cm³ | 603 cm³ |
| Rated power | 11,6 kW / 2.200 min ⁻¹ | 9,8 kW / 2.300 min ⁻¹ |
| Cylinders | V-TWIN dual cylinder | V-TWIN dual cylinder |
| Tank volume (<i>capacity</i>) | 11,4 l | 11,4 l |
| DRIVE SYSTEM | | |
| Transmission | Hydrostatic | Hydrostatic |
| Speeds | Infinitely variable (f/r) | Infinitely variable (f/r) |
| Control | Foot pedal control | Foot pedal control |
| Cruise control | Standard | Standard |
| CUTTING SYSTEM | | |
| Lawn area (<i>rec./up to</i>) | 8.000 m²/h | 8.500 m²/h |
| Cutting width | 106 cm | 107 cm |
| Cutting height (<i>min-max</i>) | 25–100 mm | 25–100 mm |
| Cutting deck | stamped | stamped |
| Number of blades | 2 | 2 |
| Deck engagement | Electric PTO | Electric PTO |
| Deck height positions | 12 positions | 12 positions |
| Deck wheels | 4 balls deck wheels | 2 balls deck wheels |
| Wash nozzle/Mulch Kit/mulching blades | Standard/(196-550-000)/(196-560-000) | Standard/Standard/Standard |
| DISCHARGE SYSTEM | | |
| Bag (<i>capacity</i>)/accessory no. | 320 l/(196-555-603 Anti-Dust-System) | Optional 200 l/(19A30030100) |
| Bag lever/hardtop | Rounded ergo telescopic handle/Plastic | –/– |
| Bag fill indicator/grass deflector | Deluxe w Blade Shutoff/(196-552A000) | –/Standard |
| FRAME | | |
| Front axle | Heavy-duty cast-iron | Heavy-duty cast-iron |
| Front bumper | Standard, yellow | Standard, yellow |
| Turning radius | TIGHT TURN xTREME 17 cm | TIGHT TURN xTREME 17 cm |
| Wheel size (<i>f/r in inch</i>) | 15 x 6 Turf Saver / 18 x 8,5 | 15 x 6 Turf Saver / 20 x 8 |
| Wheel bearings | Sleeve bearings | Sleeve bearings |
| Frame | Fully robotically-welded frame | Fully robotically-welded frame |
| ELECTRIC | | |
| Headlights | LED | LED |
| COMFORT | | |
| Seat type | Cut & Sew, high back rest | Cut & Sew, high back rest |
| Seat adjustment | Lever, angled, 10 slide | Lever, angled, 10 slide |
| Steering wheel | Ergonomic with gentle touch | Ergonomic with gentle touch |
| Toolbox/Cupholder | Standard/Standard | Standard/Standard |
| Mow in reverse (<i>RevTEK™</i>) | Standard | Standard |
| DIMENSIONS | | |
| LpA/LwA/LwAg (<i>dB</i>) | 88/98/100 | 88/98/100 |
| Vibration value body / K-factor | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions (<i>L/W/H</i>) | 250 cm / 110 cm / 118 cm | 180 cm / 134 cm / 100 cm |
| Net weight | 253 kg | 210 kg |
| PRICE | | |
| Model number | 13AFA1TR603 | 13AGA1TS603 |
| EAN |  |  |
| Price | - | - |

XT2 PS117

XT2 QS117

| ENGINE | | |
|---------------------------------------|---|---|
| Engine type | Cub Cadet | Kawasaki |
| Engine displacement | 679 cm³ | 726 cm³ |
| Rated power | 14,9 kW / n.a. min ⁻¹ | 15,8 kW / n.a. min ⁻¹ |
| Cylinders | V-TWIN dual cylinder | V-TWIN dual cylinder |
| Tank volume (<i>capacity</i>) | 11,4 l | 11,4 l |
| DRIVE SYSTEM | | |
| Transmission | Hydrostatic | Hydrostatic |
| Speeds | Infinitely variable (f/r) | Infinitely variable (f/r) |
| Control | Foot pedal control | Foot pedal control |
| Cruise control | Standard | Standard |
| CUTTING SYSTEM | | |
| Lawn area (<i>rec./up to</i>) | 9.000 m²/h | 9.000 m²/h |
| Cutting width | 117 cm | 117 cm |
| Cutting height (<i>min-max</i>) | 25–100 mm | 25–100 mm |
| Cutting deck | stamped | welded mowing deck |
| Number of blades | 2 | 2 |
| Deck engagement | Electric PTO | Electric PTO |
| Deck height positions | 12 positions | 12 positions |
| Deck wheels | 4 balls deck wheels | 4 balls deck wheels |
| Wash nozzle/Mulch Kit/mulching blades | Standard/Standard/Standard | Standard/Standard/Standard |
| DISCHARGE SYSTEM | | |
| Bag (<i>capacity</i>)/accessory no. | Optional 200 l/(19A30030100) | Optional 200 l/(19A30030100) |
| Bag lever/hardtop | –/– | –/– |
| Bag fill indicator/grass deflector | –/Standard | –/Standard |
| FRAME | | |
| Front axle | Heavy-duty cast-iron | Heavy-duty cast-iron |
| Front bumper | Standard, yellow | Standard, yellow |
| Turning radius | TIGHT TURN xTREME 17 cm | TIGHT TURN xTREME 17 cm |
| Wheel size (<i>f/r in inch</i>) | 15 x 6 Turf Saver / 20 x 8,5 | 15 x 6 Turf Saver / 20 x 8,5 |
| Wheel bearings | Sleeve bearings | Sleeve bearings |
| Frame | Fully robotically-welded frame | Fully robotically-welded frame |
| ELECTRIC | | |
| Headlights | LED | LED |
| COMFORT | | |
| Seat type | Cut & Sew, high back rest | Cut & Sew, high back rest |
| Seat adjustment | Lever, angled, 10 slide | Lever, angled, 10 slide |
| Steering wheel | Ergonomic with gentle touch | Ergonomic with gentle touch |
| Toolbox/Cupholder | Standard/Standard | Standard/Standard |
| Mow in reverse (<i>RevTEK™</i>) | Standard | Standard |
| DIMENSIONS | | |
| LpA/LwA/LwAg (<i>dB</i>) | n.a./n.a./n.a. | n.a./n.a./n.a. |
| Vibration value body / K-factor | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions (<i>L/W/H</i>) | 180 cm / 146 cm / 110 cm | 180 cm / 144 cm / 110 cm |
| Net weight | 215 kg | 230 kg |
| PRICE | | |
| Model number | 13AJA1TT603 | 13AFA1TN603 |
| EAN |  |  |
| Price | - | - |


XT2 ES107

XT3 QR106

| ENGINE | | |
|---------------------------------------|---|---|
| Engine type | Cub Cadet 56 V / 60 Ah / 3.000 Wh | Kawasaki |
| Engine displacement | – | 726 cm³ |
| Rated power | 3,0 kW / 2.100 min ⁻¹ | 11,6 kW / 2.200 min ⁻¹ |
| Cylinders | – | V-TWIN dual cylinder |
| Tank volume (<i>capacity</i>) | – | 11,4 l |
| DRIVE SYSTEM | | |
| Transmission | Electric drive | Hydrostatic, All-Ground Traction System |
| Speeds | Infinitely variable | Infinitely variable (f/r) |
| Control | Foot pedal control | Foot pedal control |
| Cruise control | Standard | Standard |
| CUTTING SYSTEM | | |
| Lawn area (<i>rec./up to</i>) | 8.000 m²/h | 8.000 m²/h |
| Cutting width | 107 cm | 106 cm |
| Cutting height (<i>min-max</i>) | 25–100 mm | 25–100 mm |
| Cutting deck | stamped | stamped |
| Number of blades | 2 | 2 |
| Deck engagement | Electric PTO | Electric PTO |
| Deck height positions | 12 positions | 12 positions |
| Deck wheels | 2 balls deck wheels | 4 balls deck wheels |
| Wash nozzle/Mulch Kit/mulching blades | –/Standard/– | Standard/(196-550-000)/(196-560-000) |
| DISCHARGE SYSTEM | | |
| Bag (<i>capacity</i>)/accessory no. | Optional 200 l/(19A30030100) | 360 l, with Anti dust system/– |
| Bag lever/hardtop | –/– | Rounded ergo telescopic handle/Plastic |
| Bag fill indicator/grass deflector | –/Standard | Deluxe w Blade Shutoff/(196-552A000) |
| FRAME | | |
| Front axle | Heavy-duty cast-iron | Heavy-duty cast-iron |
| Front bumper | Standard, blue | Bull Bar |
| Turning radius | TIGHT TURN xTREME 17 cm | TIGHT TURN xTREME 17 cm |
| Wheel size (<i>f/r in inch</i>) | 15 x 6 Turf Saver / 20 x 8 Turf Saver | 15 x 6 Turf Saver / 18 x 8,5 |
| Wheel bearings | Sleeve bearings | Sleeve bearings |
| Frame | Fully robotically-welded frame | Fully robotically-welded frame |
| ELECTRIC | | |
| Headlights | LED | LED |
| COMFORT | | |
| Seat type | Cut & Sew, high back rest | Cut & Sew, high back rest, with arm rests |
| Seat adjustment | Lever, angled, 10 slide | Lever, angled, 10 slide |
| Steering wheel | Ergonomic with gentle touch | Ergonomic with gentle touch |
| Toolbox/Cupholder | Standard/Standard | Standard/Standard |
| Mow in reverse (<i>RevTEK™</i>) | Standard | Standard |
| DIMENSIONS | | |
| LpA/LwA/LwAg (<i>dB</i>) | n.a./n.a./n.a. | 88/98/100 |
| Vibration value body / K-factor | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions (<i>L/W/H</i>) | 180 cm / 115 cm / 120 cm | 267 cm / 110 cm / 118 cm |
| Net weight | 245 kg | 268 kg |
| PRICE | | |
| Model number | 33ABA7ES603 | 13AFASTR603 |
| EAN |  |  |
| Price | - | - |

XT3 QS127

XT3 QS137

| ENGINE | | |
|---------------------------------------|---|---|
| Engine type | Kawasaki | Kawasaki |
| Engine displacement | 726 cm³ | 726 cm³ |
| Rated power | 15,0 kW / 2.800 min ⁻¹ | 14,1 kW / 2.700 min ⁻¹ |
| Cylinders | V-TWIN dual cylinder | V-TWIN dual cylinder |
| Tank volume (capacity) | 11,4 l | 11,4 l |
| DRIVE SYSTEM | | |
| Transmission | Hydrostatic, All-Ground Traction System | Hydrostatic, All-Ground Traction System |
| Speeds | Infinitely variable (f/r) | Infinitely variable (f/r) |
| Control | Foot pedal control | Foot pedal control |
| Cruise control | Standard | Standard |
| CUTTING SYSTEM | | |
| Lawn area (rec./up to) | 10.000 m²/h | 11.000 m²/h |
| Cutting width | 127 cm | 137 cm |
| Cutting height (min-max) | 25–100 mm | 25–100 mm |
| Cutting deck | stamped | welded mowing deck |
| Number of blades | 3 | 3 |
| Deck engagement | Electric PTO | Electric PTO |
| Deck height positions | 12 positions | 12 positions |
| Deck wheels | 4 balls deck wheels + roller | 4 balls deck wheels + roller |
| Wash nozzle/Mulch Kit/mulching blades | Standard/Standard/Standard | Standard/Standard/Standard |
| DISCHARGE SYSTEM | | |
| Bag (capacity)/accessory no. | Optional 210 l/(19A30018100) | Optional 210 l/(19A30018100) |
| Bag lever/hardtop | –/– | –/– |
| Bag fill indicator/grass deflector | –/Standard | –/Standard |
| FRAME | | |
| Front axle | Heavy-duty cast-iron | Heavy-duty cast-iron |
| Front bumper | Bull Bar | Bull Bar |
| Turning radius | TIGHT TURN xTREME 17 cm | TIGHT TURN xTREME 17 cm |
| Wheel size (f/r in inch) | 16 x 6,5-8 Turf Saver / 22 x 9,5 | 16 x 6,5-8 Turf Saver / 22 x 9,5 |
| Wheel bearings | Ball bearings | Ball bearings |
| Frame | Fully robotically-welded frame | Fully robotically-welded frame |
| ELECTRIC | | |
| Headlights | LED | LED |
| COMFORT | | |
| Seat type | Cut & Sew, high back rest, with arm rests | Cut & Sew, high back rest, with arm rests |
| Seat adjustment | Lever, angled, 10 slide | Lever, angled, 10 slide |
| Steering wheel | Ergonomic with gentle touch | Ergonomic with gentle touch |
| Toolbox/Cupholder | Standard/Standard | Standard/Standard |
| Mow in reverse (RevTEK™) | Standard | Standard |
| DIMENSIONS | | |
| LpA/LwA/LwAg (dB) | 93/103/105 | 93/103/105 |
| Vibration value body / K-factor | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions (L/W/H) | 197 cm / 155 cm / 110 cm | 197 cm / 167 cm / 110 cm |
| Net weight | 260 kg | 270 kg |
| PRICE | | |
| Model number | 14AFA5TQ603 | 14AFA5TM603 |
| EAN |  |  |
| Price | - | - |




THE MOST
COMPREHENSIVE
RANGE OF ACCESSORIES
FOR XT LAWN TRACTORS!

Whether it's transporting work material or cuttings, pushing seeds into the soil, spreading fertiliser, sweeping footpaths or clearing snow – the Cub Cadet XT lawn tractor can do so much more than just mow the lawn. The extensive range of Cub Cadet accessories, the largest range of its kind in Europe, will help to meet all the gardening requirements. This means you can use your XT lawn tractor all year round and it will pay for itself all the more quickly.



LAWN TRACTOR ACCESSORIES



CUB CADET HAULER

Cub Cadet hauler with 450 kg load-bearing capacity


4 008423 887013
Mod. no.: 19B40026100R
Price: -

Handle


0 037049 959068
Mod. no.: 19A400270EM
Price: -

Tool holder


0 037049 959082
Mod. no.: 19A400300EM
Price: -




HIGH LOAD CAPACITY
Rated to carry up to 450 kg with sides set upright and can easily haul soil or mulch, brick or stone, shrubs or plants, or even garbage bins.



REMOVABLE PANELS
Easier access for loading, unloading and dumping.




VERSATILE – LETS YOU DO MORE. EASY FLAT-BED HAULING
Increase versatility by operating in fold-flat mode; ideal for longer loads like logs or lumber.



HANDLE AND TOOL HOLDER FOR CUB CADET HAULER

- Soft grip handle
- Flexible use
- Swift and simple assembly




FOLDABLE SIDES FOR EASY STORAGE
Collapse all four sides and store it vertically, taking up 70 % less space than traditional yard carts in a garage or shed.



TRANSPORT PLATFORM FOR XT SERIES SIDE DISCHARGER

- Foldable vertically and lockable in place
- Easy to install thanks to the FastAttach™ System
- Max. weight: 36 kg
- Suitable for XT Series side-dischargers


0 043033 577132
Mod. no.: 19A30029100
Price: -



ELECTRIC SPREADER FOR XT SERIES SIDE DISCHARGER

- Easy to install thanks to the FastAttach™ System
- Can be switched on/off from the driver's seat
- Capacity: 45 kg
- Suitable for XT Series side-dischargers

4 008423 875775
Mod. no.: 19A30028100
Price: -



TOW BROADCAST SPREADER

- Capacity: 80 kg
- Weight: 26 kg
- Spreading width: up to 365 cm
- Dimensions (L/W/H): 109 / 96,5 / 104 cm


4 008423 816310
Mod. no.: 196-036-000
Price: -

- Capacity: 50 kg

4 008423 874129
Mod. no.: 196-545-000
Price: -

- Capacity: 39 kg
- Weight (approx.): 8 kg
- Spreading width: up to 300 cm
- Dimensions (L/W/H): 88,9 / 55,9 / 48,3 cm

4 008423 875829
Mod. no.: 196-031B000
Price: -




LAWN TRACTOR COVER L/XL

Size L: for small- and medium-sized lawn tractors

4 008423 806441
Mod. no.: 2024-U1-0003
Price: -

Size XL: for large-sized and rear discharge lawn tractors (B)


4 008423 823882
Mod. no.: 2024-U1-0004
Price: -



UTILITY CART WITH POLY BED


- Poly convertible push/tow cart, single-axle tipper
- Capacity max.: 159 kg
- Weight: 27 kg
- Dimensions approx. (L/W/H): 142,2 / 83,8 / 76,2 cm

4 008423 804331
Mod. no.: 190-236A000
Price: -




- Poly convertible push/tow cart, single-axle tipper
- Capacity max.: 175 kg
- Weight: 30 kg

4 008423 816396
Mod. no.: 196-506-000
Price: -




- Tow steel dump cart, single-axle tipper, removable tailgate
- Capacity max.: 159 kg
- Dimensions approx. (L/W/H): 152,4 / 83,8 / 72 cm
- Weight (approx.): 33 kg

4 016918 006894
Mod. no.: 190-223B000
Price: -



- Tow steel dump cart, single-axle tipper, removable tailgate
- Capacity max.: 340 kg
- Dimensions approx. (L/W/H): 177,8 / 83,8 / 73,7 cm
- Weight (approx.): 70 kg




4 008423 804348
Mod. no.: 196-507-000
Price: -









SPRAYER






Tow sprayer, large, 6,8 l/min, capacity 95 l, dimensions approx. (L/W/H): 139,7 / 66 / 50,8 cm



4 008423 804430
Mod. no.: 190-537-000
Price: -









| CUB CADET TOW BEHIND SWEEPER | | |
|---|---|---|
|  | <ul style="list-style-type: none"> Working width: 107 cm Catcher capacity: 380 litre Weight: 31,3 kg |  4 008423 807516 Mod. no.: 190-163A000 Price: - |
| | <ul style="list-style-type: none"> Working width: 112 cm Catcher capacity: 736 litre |  4 008423 858976 Mod. no.: 196-543-000 Price: - |




| LAWN ROLLERS | | |
|---|--|---|
|  | Push/tow poly lawn roller, max. weight 114 kg when filled with water, width 61 cm, diam. 46 cm, dimensions approx. (L/W/H): 127 / 76,2 / 46 cm |  4 008423 401264 Mod. no.: 190-228-000 Price: - |
| | Tow poly lawn roller, max. weight 182 kg when filled with water, width 91 cm, diam. 46 cm, dimensions approx. (L/W/H): 127 / 106,7 / 46 cm |  4 008423 804478 Mod. no.: 190-229-000 Price: - |

| AERATORS/DE-THATCHER | | |
|--|---|---|
|  | Attachable lawn rake, working width 102 cm, 20 tines, variable load, dimensions (L/W/H): 104/101,6/104 cm |  4 008423 804454 Mod. no.: 190-526-000 Price: - |
| | Tow-Lawn Aerator, working width 102 cm, 10 galvanised aerator stars, variable load by additional loading, up to 6 cm aeration depth |  4 008423 896367 Mod. no.: 196-094-000 Price: - |

| MULCH KITS | | |
|---|---|---|
|  | Mulch Kit (without blades) for model LT1 NS96 and LT2 NS96 |  4 008423 819632 Mod. no.: OEM-190A116 Price: - |
| | Mulch Kit (without blades) for models LT1 NR92, LT2 NR92 and LT3 PR105 |  4 008423 836080 Mod. no.: 196-749A678 Price: - |
| | Mulch Kit (without blade) for models XT1 OR106, XT2 QR106, XT2 PR106i and XT3 QR106, mulching plug optional available (196-560-000) |  4 008423 875652 Mod. no.: 196-550-000 Price: - |
| | Mulch Kit (without blade) for models XT1 OR95 and XT2 PR95, mulching plug optional available (196-561-000) |  4 008423 875669 Mod. no.: 196-551-000 Price: - |

| AGRICULTURAL TIRES | | |
|---|---|---|
|  | Chevron style rear wheels 18" x 9,5". Set consists of 2 cpl. wheels. Fits all tractors with either 18" or 20" rear wheels. Not approved for XT3 models. |  4 008423 816891 Mod. no.: 196-721A678 Price: - |

| GRASS CATCHER | | |
|---|--|--|
|  | Anti-Dust-System for 360 l grass collection system, XT3 Series |  4 008423 874976 Mod. no.: 196-553-603 Price: - |
| | Anti-Dust-System for 320 l grass collection system, XT1 and XT2 Series |  4 008423 875089 Mod. no.: 196-555-603 Price: - |
|  | Twin bagger, 200 l, for 96 cm / 107 cm decks of LT Series |  4 008423 815849 Mod. no.: OEM-190-180A Price: - |
| | Twin bagger, 200 l, for 96 cm decks of XT Series |  4 008423 883350 Mod. no.: OEMR190-180A Price: - |
| | Twin bagger for 200 l, for 107 / 117 cm, with variable tube, inspection window and FastAttach™ System, for decks of LT and XT Series |  4 008423 879636 Mod. no.: 19A30030100 Price: - |
| | Triple bagger 210 l, for 127 / 137 cm decks of XT Series |  0 037049 957286 Mod. no.: 19A30018100 Price: - |

| FRONT BUMPER | | |
|---|--|--|
|  | Front bumper, fits all LT Series lawn tractors |  4 008423 917819 Mod. no.: OEM-190-679 Price: - €* / |
| | Front Bumper Bull Bar, XT Series |  4 056494 171210 Mod. no.: 196-564-000 Price: - |






| DEFLECTORS | | |
|---|---|-----------------------------------|
| Rear deflector for LT Series rear-discharger models |  4 008423 836097 Mod. no.: 196-750A678 Price: - | Mod. no.: 196-750A678 Price: - |
| Deflector for all XT series rear discharge lawnmowers |  4 008423 899641 Mod. no.: 196-552A000 Price: - | Mod. no.: 196-552A000 Price: - |

| REAR HITCH | | |
|--|---|-----------------------------------|
| Rear hitch for LT series with rear discharge |  4 008423 914733 Mod. no.: 196-399-000 Price: - | Mod. no.: 196-399-000 Price: - |


TIELBÜRGER FRONT ATTACHMENT SWEEPER AND ACCESSORIES (RE=REQUIRED | OP=OPTIONAL)

| | | |
|--|---|--|
|  | Front attachment sweeper, 120 cm. Accessories for mounting are required. See below. | 4 008423 883510 Mod. no.: 196-603-000 Price: - |
|  | OP: Hopper for front attachment sweeper | 4 008423 883527 Mod. no.: 196-604-000 Price: - |
|  | RE: Quick-action coupling system with drive – attachment for front attachment sweeper and premium dozer blade | 4 008423 883503 Mod. no.: 196-602-000 Price: - |
|  | RE: For rear discharge Drive line | 4 008423 885194 Mod. no.: 196-608-000 Price: - |
| | RE: For side discharge Drive line (up to and including date of manufacture 2017) | 4 008423 885200 Mod. no.: 196-609-000 Price: - |
|  | RE: For rear discharge Add-on parts | 4 008423 885217 Mod. no.: 196-610-000 Price: - |
| | RE: For side discharge Add-on parts (up to and including date of manufacture 2017) | 4 008423 885224 Mod. no.: 196-611-000 Price: - |


TIELBÜRGER PREMIUM DOZER BLADE AND ACCESSORIES (RE=REQUIRED | OP=OPTIONAL)

| | | |
|---|---|--|
|  | Premium dozer blade, 125 cm. Accessories for mounting are required. See below. | 4 008423 883534 Mod. no.: 196-606-000 Price: - |
|  | OP: Wheels for Premium dozer blade | 4 008423 883541 Mod. no.: 196-607-000 Price: - |
|  | RE: Quick-action coupling system without drive – attachment for premium dozer blade | 4 008423 883497 Mod. no.: 196-601-000 Price: - |
|  | OP: Quick-action coupling system with drive – attachment for front attachment sweeper and premium dozer blade | 4 008423 883503 Mod. no.: 196-602-000 Price: - |
|  | RE: For rear discharge Add-on parts | 4 008423 885217 Mod. no.: 196-610-000 Price: - |
| | RE: For side discharge Add-on parts (up to and including date of manufacture 2017) | 4 008423 885224 Mod. no.: 196-611-000 Price: - |

TIRE CHAINS

| | | |
|---|---|---|
|  | For 20" x 8,0" wheels incl. Adapter | 4 008423 824797 Mod. no.: 196-658-699 Price: - |
| | For 18" x 9,5" wheels incl. Adapter | 4 008423 813678 Mod. no.: 196-898-699 Price: - |
| | For XT 22" x 9", 5" x 12" and 23" x 9", 5" x 12" wheels | 0 037049 945597 Mod. no.: 490-241-0025 Price: - |

DOZER BLADE AND RUBBER LIP

| | | |
|--|---|--|
|  | 117 cm dozer blade for LT Series | 4 008423 807684 Mod. no.: OEM-190-833 Price: - |
| | Rubber lip – universal – for all dozer blades | 4 008423 815368 Mod. no.: 196-718-678 Price: - |
| | 117 cm dozer blade for LT und XT Series | 0 037049 957309 Mod. no.: 19A30017OEM Price: - |
| | Installation Kit – for attaching OEM-190-833 in the XT Series | 4 008423 879629 Mod. no.: 196-584-000 Price: - |

ADDITIONAL XT ACCESSORIES

| | | |
|--|-----------------|-----------------------------------|
| Battery charger for LR, LT and XT Series | 4 008423 835694 | Mod.-Nr.: 196-967-678 Preis: - |
| Electrical grass catcher emptying mechanism for XT Series rear discharger system. Only suitable for 2018 and later models. | 4 008423 882025 | Mod.-Nr.: 196-570-600 Preis: - |
| Mounted snow thrower for XT Series side discharger, 107 cm, 3-stepped | 0 043033 573585 | Mod.-Nr.: 19A40024100 Preis: - |
| Mounted snow thrower for XT Series rear discharger, 107 cm, 3-stepped | 0 016918 038936 | Mod.-Nr.: 19A40045OEM Preis: - |
| Fuel canister, 10 litre | 4 008423 877540 | Mod.-Nr.: 196-558-603 Preis: - |

XZ3
ENDURO SERIES™

XZ6
ENDURO SERIES™



XZ3 122

| | |
|----------------------------|------------------------------------|
| Cutting width: | 122 cm |
| Lawn area (rec.): | 11.000 m²/h |
| Collecting volume: | Optional 300 l |
| Engine: | Kawasaki OHV, V-TWIN dual cylinder |
| Engine displacement: | 726 cm³ |
| Drive: | Dual Hydrostatic |
| Cutting height adjustment: | 15 positions |
| Model no.: | 47AIDGH8603 |
| Price: | - |



XZ6 S107

| | |
|----------------------------|---------------------------------|
| Cutting width: | 107 cm |
| Lawn area (rec.): | 10.000 m²/h |
| Collecting volume: | Optional 230 l |
| Engine: | Cub Cadet, V-TWIN dual cylinder |
| Engine displacement: | 679 cm³ |
| Drive: | Dual Hydrostatic |
| Cutting height adjustment: | 15 positions |
| Model no.: | 17AAGBYE603 |
| Price: | - |



XZ6 S117

| | |
|----------------------------|--------------------------------|
| Cutting width: | 117 cm |
| Lawn area (rec.): | 10.500 m²/h |
| Collecting volume: | Optional 230 l |
| Engine: | Kawasaki, V-TWIN dual cylinder |
| Engine displacement: | 726 cm³ |
| Drive: | Dual Hydrostatic |
| Cutting height adjustment: | 15 positions |
| Model no.: | 17AIGBYN603 |
| Price: | - |




XZ6 S127

| | |
|----------------------------|--------------------------------|
| Cutting width: | 127 cm |
| Lawn area (rec.): | 11.500 m²/h |
| Collecting volume: | Optional 230 l |
| Engine: | Kawasaki, V-TWIN dual cylinder |
| Engine displacement: | 726 cm³ |
| Drive: | Dual Hydrostatic |
| Cutting height adjustment: | 15 positions |
| Model no.: | 17AIGGY2603 |
| Price: | - |

**SYNCHRO STEER®
TECHNOLOGY**

OUTSTANDING MANOEUVRABILITY AND SLOPE HANDLING The Cub Cadet Synchro Steer® Technology is the next step of the evolution of the Zero-Turn technique. Our unique Zero-Turn riders with a traditional steering wheel provide you with the amazing manoeuvrability of a conventional Zero-Turn but retaining full control of the front wheels. Steering and drive are perfectly synchronized to ensure the exact speed and rotation direction of each rear wheel, whatever the position of the front wheels. This revolutionary technology is available for the XZ3 and XZ6 Series.



Learn more

ZERO TURNING RADIUS – GREAT VARIETY

High-performance meets practicality for one strong rider. The industry's first zero-turn system with steering wheel control and four-wheel steering for unmatched strength and stability. From the power of a professional-grade engine to its unbeatable efficiency and durability, every mow is as strong as the last.



ADJUSTABLE STEERING COLUMN
The XZ3 and XZ6 models are equipped with an adjustable steering column so you can set your own comfy seating position.



PNEUMATIC CASTER WHEELS
Controllable pneumatic front caster wheels which support the Zero-Turn of your XZ.



ULTRA-BRIGHT LED HEADLIGHTS
Best visibility for XZ6 models in poor lighting conditions, e.g. at dawn and dusk.



ROBUST TUBULAR STEEL FRAME
A muscular tubular steel frame gives you optimal strength and durability to maneuver around obstacles with ease.




COMFORTABLE SEAT WITH ARMRESTS
An adjustable high-back seat with armrests makes hard work far more comfortable.



SOLID, WELDED MOWER DECKS
on all XZ3 and XZ6 models. For high durability and absolute robustness.




STEERING WHEEL
A soft grip steering wheel for best control, however tough the conditions.



CLEAN CUT
The floating deck follows ground contours for superior cutting and a smoother and more uniform look.

XZ5

ENDURO SERIES™



XZ5 L107 - ULTIMA

| | |
|----------------------------|---------------------------------|
| Cutting width: | 107 cm |
| Lawn area (rec.): | 10.000 m²/h |
| Collecting volume: | Optional 230 l |
| Engine: | Cub Cadet, V-Twin dual cylinder |
| Engine displacement: | 679 cm³ |
| Drive: | Dual Hydrostatic |
| Cutting height adjustment: | 15 positions |
| Model no.: | 17BAEAC5603 |
| Price: | - |



XZ5 L127 - ULTIMA

| | |
|----------------------------|------------------------------------|
| Cutting width: | 127 cm |
| Lawn area (rec.): | 11.500 m²/h |
| Collecting volume: | Optional 230 l |
| Engine: | Kawasaki OHV, V-Twin dual cylinder |
| Engine displacement: | 726 cm³ |
| Drive: | Dual Hydrostatic |
| Cutting height adjustment: | 15 positions |
| Model no.: | 17AIEACL603 |
| Price: | - |




XZ5 L137 - ULTIMA


| | |
|----------------------------|------------------------------------|
| Cutting width: | 137 cm |
| Lawn area (rec.): | 12.500 m²/h |
| Collecting volume: | Optional 230 l |
| Engine: | Kawasaki OHV, V-Twin dual cylinder |
| Engine displacement: | 726 cm³ |
| Drive: | Dual Hydrostatic |
| Cutting height adjustment: | 15 positions |
| Model no.: | 17AIEAC3603 |
| Price: | - |




DRIVING FORWARD




TURNING TO THE RIGHT



TURNING TO THE LEFT



DRIVING REVERSE



EXECUTING A ZERO-TURN

XZ5: BENEFIT FROM THE BEST IN CLASS

The innovative lap-bar technology combined with the extremely robust construction consisting of heavy-duty components and high-performance engines makes the XZ5 Series the ideal solution for large lawn areas.



EXTREMELY RUGGED

The XZ5 models have an extremely robust steel mowing deck and a light-weight tubular steel frame, giving them an extremely long service-life.



ULTRA-BRIGHT LED HEADLIGHTS

Best visibility in poor lighting conditions, e.g. at dawn and dusk.



EXCEPTIONALLY LOW VIBRATION

With ergonomic soft grips and rubber floor mats.



INDIVIDUALLY ADJUSTABLE SEAT

With high back and armrests for comfortable, fatigue-free operation.



EXTREMELY POWERFUL

Driven by powerful Cub Cadet and Kawasaki engines, the XZ5 models reach speeds of up to 12 km/h, enabling them to mow up to 50 % faster than conventional front cut mowers.



LARGEST TIRES IN ITS CLASS

The premium tires of the XZ5 127 and XZ5 137 models provide better traction. They also offer more stability and control.



Learn more

SOLID ROLLOVER PROTECTION
Fully welded tubular steel frame for maximum safety already as standard equipment.

XZ7

ENDURO SERIES™



TOP SPEED
With a top speed of up to 14,5 km/h, even the largest lawns are mowed in no time.

ULTRA-BRIGHT LED HEADLIGHTS
Best visibility when working at dawn and dusk.



To the videos



3-in-1
OPTION
Powered by
KAWASAKI

XZ7 L122 - ULTIMA

| | |
|----------------------------|--------------------------------|
| Cutting width: | 122 cm |
| Lawn area (rec.): | 11.000 m²/h |
| Collecting volume: | Optional 380 l |
| Engine: | Kawasaki, V-TWIN dual cylinder |
| Engine displacement: | 726 cm³ |
| Drive: | Dual Hydrostatic |
| Cutting height adjustment: | 16 positions |
| Model no.: | 47AIAAA6603 |
| Price: | - |



3-in-1
OPTION
POWERED BY
KOHLER

XZ7 L152i - ULTIMA

| | |
|----------------------------|----------------------------------|
| Cutting width: | 152 cm |
| Lawn area (rec.): | 15.000 m²/h |
| Collecting volume: | Optional 380 l |
| Engine: | KOHLER EFI, V-TWIN dual cylinder |
| Engine displacement: | 747 cm³ |
| Drive: | Dual Hydrostatic |
| Cutting height adjustment: | 16 positions |
| Model no.: | 47ATAHA8603 |
| Price: | - |

3 YEARS
500 HOURS*
WARRANTY
PRIVATE &
BUSINESS

DESIGNED FOR EVERY CHALLENGE

The top-of-the-line model in the ENDURO XZ Series makes a great impression with its improved stability and durability. You can easily mow with maximum comfort even under the most difficult conditions.



ROBUST MOWING DECK
The robust tubular steel frame as well as the welded, all-round reinforced AeroForce Max™ mowing deck for ultimate bagging performance provides the necessary strength for a consistently high cut quality.



MAXIMUM COMFORT
The premium seat with a high backrest has padded armrests and special cushioning. This significantly reduces vibrations even at high speeds.



OUTSTANDING GRASS COLLECTION
The AeroForce Max™ mowing deck uses the air flow from the rotating blades to propel the grass clippings in a high arc into the optionally available collecting basket. This fills the bag to the top without clumping.






SPRING-MOUNTED FRONT-WHEEL SUSPENSION
The individually-suspended wheels ensure a smooth ride with less vibration, even on the most difficult lawns.






INFINITE DIVERSITY
In addition to the included mulching kit the standard rear hitch gives you the option to combine your XZ7 with a wide variety of accessories.



GUARANTEED DURABILITY
We trust our new XZ7 models with maximum durability and robustness and offer a warranty of 3 years or up to 500 working hours* – for commercial or private use.

| | NEW XZ6 S107 | NEW XZ6 S117 | NEW XZ6 S127 |
|-------------------------------------|---|---|---|
| ENGINE | | | |
| Engine type | Cub Cadet | Kawasaki | Kawasaki |
| Engine displacement | 679 cm³ | 726 cm³ | 726 cm³ |
| Rated power | 14,9 kW / n.a. min ⁻¹ | 16,9 kW / n.a. min ⁻¹ | 16,9 kW / n.a. min ⁻¹ |
| Cylinders | V-TWIN dual cylinder | V-TWIN dual cylinder | V-TWIN dual cylinder |
| Tank volume (capacity) | 13,25 l | 13,25 l | 13,25 l |
| Lubrication | Full-pressure with spin-on oil filter | Full-pressure with spin-on oil filter | Full-pressure with spin-on oil filter |
| DRIVE SYSTEM | | | |
| Transmission | Dual Hydrostatic | Dual Hydrostatic | Dual Hydrostatic |
| Control | Dual foot pedal control | Dual foot pedal control | Dual foot pedal control |
| Cruise control | - | - | - |
| CUTTING SYSTEM | | | |
| Lawn area (rec./up to) | 10.000 m²/h | 10.500 m²/h | 11.500 m²/h |
| Cutting width | 107 cm | 117 cm | 127 cm |
| Cutting height (min-max) | 25–114 mm | 25–114 mm | 25–114 mm |
| Cutting options | 3-in-1 option | 3-in-1 option | 3-in-1 Option |
| Number of blades | 2 | 2 | 3 |
| Deck engagement | Electric PTO | Electric PTO | Electric PTO |
| Deck height positions | 15 positions | 15 positions | 15 positions |
| Deck wheels | 2 | 2 | 3 |
| Wash nozzle/Mulch Kit | –/Standard | –/Standard | –/Standard |
| DISCHARGE SYSTEM | | | |
| Bag (capacity in l)/accessory no. | Optional 230 l/(19A70054100 + 490-950-C062) | Optional 230 l/(19A70054100 + 490-950-C062) | Optional 230 l/(19A70054100 + 490-950-C062) |
| Grass deflector | Standard | Standard | Standard |
| FRAME | | | |
| Front axle | Steel | Steel | Steel |
| Front bumper/rear bumper | – / – | – / – | – / – |
| Turning radius (cm) | 0 cm | 0 cm | 0 cm |
| Wheel size (f/r in inch) | 13 x 6,5 / 20 x 8 | 13 x 6,5 / 20 x 10 | 13 x 6,5 / 20 x 12 |
| Wheel bearings | Sleeve bearings | Sleeve bearings | Ball-bearings |
| ELECTRICAL SYSTEM | | | |
| Battery | 12 V / 230 CCA | 12 V / 230 CCA | 12 V / 230 CCA |
| Headlights | – | – | – |
| Hour metre/service minder | Standard | Standard | Standard |
| Safety systems | Operator presence, brake switch, deck clutch switch | Operator presence, brake switch, deck clutch switch | Operator presence, brake switch, deck clutch switch |
| COMFORT | | | |
| Seat type | High back with arm rests | High back, with arm rests | High back, with arm rests |
| Seat adjustment | Quick adjuster lever | Quick adjuster lever | Quick adjuster lever |
| Steering wheel | Soft-Grip, tilt steering column | Soft-Grip, tilt steering column | Soft-Grip, tilt steering column |
| Utility bin | Standard | Standard | Standard |
| Mow in reverse | Standard | Standard | Standard |
| DIMENSIONS | | | |
| LpA/LwA/LwAg (dB) | n.a./n.a./n.a | n.a./n.a./n.a. | n.a./n.a./n.a. |
| Vibration value body/K-factor | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions (L/W/H) | 203 cm / 132 cm / 114 cm | 203 cm / 155 cm / 114 cm | 203 cm / 126 cm / 118 cm |
| Net weight | 267 kg | 285 kg | 265 kg |
| PRICE | | | |
| Model number | 17AAGBYE603 | 17AIGBYN603 | 17AIGGY2603 |
| EAN |  |  |  |
| Price | - | - | - |

| | XZ3 122 | XZ5 L107 - ULTIMA | XZ5 L127 - ULTIMA |
|-------------------------------------|---|---|---|
| ENGINE | | | |
| Engine type | Kawasaki OHV | Cub Cadet | Kawasaki OHV |
| Engine displacement | 726 cm³ | 679 cm³ | 726 cm³ |
| Rated power | 12,3 kW / 2.750 min ⁻¹ | 11,4 kW / 2.350 min ⁻¹ | 14,1 kW / 2.800 min ⁻¹ |
| Cylinders | V-TWIN dual cylinder | V-Twin dual cylinder | V-Twin dual cylinder |
| Tank volume (capacity) | 17,0 l | 13,25 l | 13,25 l |
| Lubrication | Full-pressure with spin-on oil filter | Full-pressure with spin-on oil filter | Full-pressure with spin-on oil filter |
| DRIVE SYSTEM | | | |
| Transmission | Dual Hydrostatic | Dual Hydrostatic | Dual Hydrostatic |
| Control | Dual foot pedal control | Control lever | Control lever |
| Cruise control | Standard | – | – |
| CUTTING SYSTEM | | | |
| Lawn area (rec./up to) | 11.000 m²/h | 10.000 m²/h | 11.500 m²/h |
| Cutting width | 122 cm | 107 cm | 127 cm |
| Cutting height (min-max) | 25–102 mm | 25–115 mm | 25–115 mm |
| Cutting options | 3-in-1 Option | 3-in-1 Option | 3-in-1 Option |
| Number of blades | 3 | 2 | 3 |
| Deck engagement | Electric PTO | Electric PTO | Electric PTO |
| Deck height positions | 15 positions | 15 positions | 15 positions |
| Deck wheels | 2 | 2 | 3 |
| Wash nozzle/Mulch Kit | Standard/Standard | Standard/Standard | Standard/Standard |
| DISCHARGE SYSTEM | | | |
| Bag (capacity in l)/accessory no. | Optional 300 l/(19A70040100) | Optional 230 l/(19A70054100) | Optional 230 l/(19A70055100) |
| Grass deflector | Standard | Standard | Standard |
| FRAME | | | |
| Front axle | Steel | Steel | Steel |
| Front bumper/rear bumper | Standard / – | – / Tubular steel frame | – / Tubular steel frame |
| Turning radius (cm) | 0 cm | 0 cm | 0 cm |
| Wheel size (f/r in inch) | 13 x 5 / 20 x 10 | 11 x 6 / 20 x 8 | 11 x 6 / 20 x 10 |
| Wheel bearings | Ball-bearings | – | – |
| ELECTRICAL SYSTEM | | | |
| Battery | 12 V / 230 CCA | 12 V / 230 CCA | 12 V / 230 CCA |
| Headlights | – | LED | LED |
| Hour metre/service minder | Standard | Standard | Standard |
| Safety systems | Operator presence, brake switch, deck clutch switch | Standard | – |
| COMFORT | | | |
| Seat type | High back with armrests | High back, with arm rests | High back with armrests |
| Seat adjustment | Quick adjuster lever | Quick adjuster lever | Quick adjuster lever |
| Steering wheel | Soft-Grip | 2-way adjustable lap bars with comfort grips | 2-way adjustable lap bars with comfort grips |
| Utility bin | Standard | Standard | Standard |
| Mow in reverse | Standard | Standard | Standard |
| DIMENSIONS | | | |
| LpA/LwA/LwAg (dB) | 93/103/105 | 88/98/100 | 93/103/105 |
| Vibration value body/K-factor | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions (L/W/H) | 194 cm / 124 cm / 118 cm | 203 cm / 132 cm / 114 cm | 203 cm / 155 cm / 114 cm |
| Net weight | 312 kg | 267 kg | 285 kg |
| PRICE | | | |
| Model number | 47AIDGHB603 | 17BAEAC5603 | 17AIEACL603 |
| EAN |  |  |  |
| Price | - | - | - |

XZ5 L137 - ULTIMA XZ7 L122 - ULTIMA XZ7 L152i - ULTIMA

| ENGINE | | | |
|-------------------------------------|--|--|--|
| Engine type | Kawasaki OHV | Kawasaki | KOHLER EFI |
| Engine displacement | 726 cm³ | 726 cm³ | 747 cm³ |
| Rated power | 14,7 kW / 2.900 min ⁻¹ | 14,4 kW / 2.700 min ⁻¹ | 14,8 kW / 2.700 min ⁻¹ |
| Cylinders | V-Twin dual cylinder | V-TWIN dual cylinder | V-TWIN dual cylinder |
| Tank volume (capacity) | 13,25 l | 20,8 l | 20,8 l |
| Lubrication | Full-pressure with spin-on oil filter | Full-pressure with spin-on oil filter | Full-pressure with spin-on oil filter |
| DRIVE SYSTEM | | | |
| Transmission | Dual Hydrostatic | Dual Hydrostatic | Dual Hydrostatic |
| Control | Control lever | Control lever | Control lever |
| Cruise control | – | – | Standard |
| CUTTING SYSTEM | | | |
| Lawn area (rec./up to) | 12.500 m²/h | 11.000 m²/h | 15.000 m²/h |
| Cutting width | 137 cm | 122 cm | 152 cm |
| Cutting height (min-max) | 25–115 mm | 25–114 mm | 25–114 mm |
| Cutting options | 3-in-1 Option | 3-in-1 option | 3-in-1 option |
| Number of blades | 3 | 3 | 3 |
| Deck engagement | Electric PTO | Electric PTO | Electric PTO |
| Deck height positions | 15 positions | 16 positions | 16 positions |
| Deck wheels | 3 | 2 | 2 + Nose |
| Wash nozzle/Mulch Kit | Standard/Standard | –/Standard | –/Standard |
| DISCHARGE SYSTEM | | | |
| Bag (capacity in l)/accessory no. | Optional 230 l/(19A70055100) | Optional 380 l/(49A70001100) | Optional 380 l/(49A70002100) |
| Grass deflector | Standard | Standard | Standard |
| FRAME | | | |
| Front axle | Steel | Steel, with front wheel suspension | Steel, with front wheel suspension |
| Front bumper/rear bumper | – / Tubular steel frame | – / Tubular steel frame | – / Tubular steel frame |
| Turning radius (cm) | 0 cm | 0 cm | 0 cm |
| Wheel size (f/r in inch) | 13 x 6,5 / 20 x 12 | 13 x 6,5 / 23 x 12 | 13 x 6,5 / 24 x 12 |
| Wheel bearings | – | n.a. | n.a. |
| ELECTRICAL SYSTEM | | | |
| Battery | 12 V / 230 CCA | 12 V / 230 CCA | 12 V / 230 CCA |
| Headlights | LED | LED | LED |
| Hour metre/service minder | Standard | Standard | Standard |
| Safety systems | Standard | Standard | Standard |
| COMFORT | | | |
| Seat type | High back with armrests | Premium, high back with armrests | Premium, high back with armrests, individually adjustable suspension |
| Seat adjustment | Quick adjuster lever | Quick adjuster lever | Quick adjuster lever |
| Steering wheel | 2-way adjustable lap bars with comfort grips | 2-way adjustable lap bars with comfort grips | 2-way adjustable lap bars with comfort grips |
| Utility bin | Standard | Standard | Standard |
| Mow in reverse | Standard | Standard | Standard |
| DIMENSIONS | | | |
| LpA/LwA/LwAg (dB) | 93/103/105 | 93/103/105 | 93/103/105 |
| Vibration value body/K-factor | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² |
| Vibration value hand/arm / K-factor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions (L/W/H) | 203 cm / 164 cm / 117 cm | 232 cm / 145 cm / 134 cm | 233 cm / 177 cm / 134 cm |
| Net weight | 312 kg | 415 kg | 450 kg |
| PRICE | | | |
| Model number | 17AIEAC3603 | 47AIAAA6603 | 47ATAHA8603 |
| EAN | 4 008423 913163 | 4 008423 916805 | 4 008423 916812 |
| Price | – | – | – |

ZERO-TURNS ACCESSORIES

|  | Twin bagger, 200 l, for XZ2 117i | 0 037049 957835 | Mod. no.: 19C70020100 Price: – |
|---|---|-----------------|------------------------------------|
| | Twin bagger, 200 l, for XZ2 127 | 0 043033 565085 | Mod. no.: 19A70043100 Price: – |
| | Triple bagger, 300 l, for XZ3 122 | 0 043033 565054 | Mod. no.: 19A70040100 Price: – |
| | Cub Cadet RZT Twin Bagger, 107 cm, 230 litres for XZ5 | 4 008423 913361 | Mod. no.: 19A70054100 Price: – |
| | Cub Cadet RZT Twin Bagger, 127 / 137 cm, 230 litres for XZ5 | 0 037049 965410 | Mod.-Nr.: 19A70055100 Preis: – |
|  | Triple Bagger 380 l, for XZ7 with 122cm cutting width | 4 008423 917987 | Mod.-Nr.: 49A70001100 Preis: – |
| | Triple Bagger 380 l, for XZ7 with 152cm cutting width | 4 008423 917994 | Mod. no.: 49A70002100 Price: – |
| | Weight kit for use with the grass catcher of all XZ6 models | 0 889021 302702 | Mod. no.: 490-950-C062 Price: – |
|  | HITCH / XZ | | |
| | Hitch for all XZ models | 0 043033 565054 | Mod. no.: 19A70025100 Price: – |






PRO Z SERIES



DURABILITY – HEAVIEST DUTY

From the frame to the front yoke, every part of the PRO Z is designed to handle serious rigors. The thickness of the cutting deck establishes a new industry standard, while an all-around heavy-duty construction ensures this zero-turn will last for the long haul.

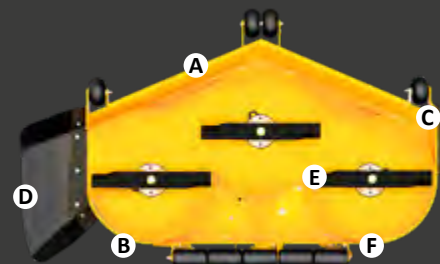

THE THICKEST, STRONGEST STEEL DECK IN THE INDUSTRY

Tackle the toughest conditions with the industry's only triple-7-gauge steel cutting deck: a 7-gauge deck shell with 7-gauge top and bottom reinforcements.

DURABILITY

- A** 1/4" leading rolled edge
- B** 5/16" steel side reinforcements
- C** 3/4" wear guard

QUALITY CUT

- D** Flexible rubber discharge chute
- E** High-lift Marbain® blades (with blade tip speed up to 18,500 fpm)
- F** Adjustable rear stripping roller

BEEFED-UP FRONT END

Absorb the impact of rough terrain with a new front-end construction featuring a best-in-class combination of axle, hub and yoke size.



- A** 2" x 3" pivoting front axle
- B** Isolation damping system
- C** 5" steel hubs
- D** 1/2" thick steel front yokes



BUILT USING THE HIGHEST
QUALITY COMPONENTS SOURCED
LOCALLY AND GLOBALLY

COMFORT – WORK HARD. RIDE EASY

The PRO Z can take a beating, but your body shouldn't. Enjoy a smoother ride all day long with the enhanced comfort features of the PRO Z Series.



PRO Z AIR-RIDE SEAT

Our exclusive air-ride seat allows riders to adjust the seat firmness to their personal preference.

- A** Isolation damping system under the seat (PRO Z 5/7/9)
- B** Lumbar support
- C** EVC cushion (elastic vibration control)
- D** Angle adjustment
- E** Padded armrests



PIVOTING FRONT AXLE

A pivoting front axle allows the front end of the PRO Z to negotiate unseen terrain while protecting the quality of the cut. The frame and axle float as the PRO Z moves, allowing the deck to follow the terrain profile and avoid scalping.



Z1 137

The new Zero-Turn Z1 137 exceeds your expectations, not your budget. Equipped with a powerful cutting deck, it always delivers professional-quality results. Its outstanding speed, efficiency and comfort impress anybody who works daily with this Zero-Turn mower.



KOHLER CONFIDANT
EFI EZT 745

Z1 137 
TOP EFFICIENCY.
UNBELIEVABLE
MANEUVERABILITY.

POWERED BY
KOHLER.



- A POWER MACHINE**
With its fast speed of 15 km/h, the Z1 137 is at least twice as fast as a normal lawn tractor, excelling in efficiency.
- B MORE COMFORTABLE THAN EVER**
High-comfort seat, suspension and non-slip controls guarantee safe and fatigue-free work.
- C MARKET-LEADING EFFICIENCY**
25 % less fuel consumption with electronic fuel injection (EFI).
- D STRONG AND ROBUST**
Welded mowing deck with 137 cm cutting width for endless power.
- E EXTREMELY AGILE**
The unique 360° turning radius technology helps you negotiate tight corners and obstacles easily.

| | |
|----------------------------|--|
| Cutting width: | 137 cm |
| Area performance (rec.): | 13.500 m²/h |
| Discharge type: | Side discharge |
| Engine: | KOHLER Confidant EFI EZT 745, V-TWIN dual cylinder |
| Engine displacement: | 747 cm³ |
| Drive: | Dual Hydrostatic |
| Transmission: | Hydrogear ZT3400 |
| Max. speed: | 15 km/h (forward)/7 km/h (reverse) |
| Cutting height adjustment: | 17 positions |

Model no.: 53CWEFJA603 Price: -




KAWASAKI OHV
V-TWIN DUAL CYLINDER

Z5 152 & Z7 183

Amazing strength and unsurpassed comfort – the perfect combination for true professionals! The Z5 152 offers performance, quality and efficiency that put other leading Zero-Turn mowers in the shade. This makes the Z7 183 the absolute top model that needs much less mowing time than any other product. However much you demand from a mower, you will love it!



KAWASAKI 31 HP ENGINE
A super-strong and efficient drive to meet optimal requirements (Z7 183).

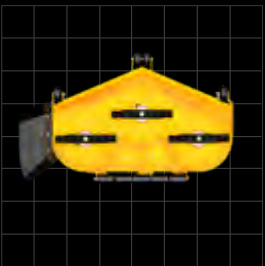

STRONGEST MOWING DECK
ON THE MARKET
With its massive cutting width of 183 cm, cover more ground than any other mower (Z7 183).

Z5 152

STRENGTH IN EVERY DETAIL.



Powered by
Kawasaki

| | |
|----------------------------|------------------------------------|
| Cutting width: | 152 cm |
| Area performance (rec.): | 15.000 m²/h |
| Discharge type: | Side discharge |
| Engine: | Kawasaki OHV, V-TWIN dual cylinder |
| Engine displacement: | 852 cm³ |
| Drive: | Dual Hydrostatic |
| Transmission: | Parker HTG 12 cc |
| Max. speed: | 16 km/h (forward)/8 km/h (reverse) |
| Cutting height adjustment: | 17 positions |

Model no.: 53BIHJUV603

Price: -

Z7 183

THE ABSOLUTE POWER PACK FOR TOP REQUIREMENTS.



Powered by
Kawasaki

| | |
|----------------------------|---------------------------------------|
| Cutting width: | 183 cm |
| Lawn area (rec.): | 18.000 m²/h |
| Discharge type: | Side discharge |
| Engine: | Kawasaki OHV, V-TWIN dual cylinder |
| Engine displacement: | 999 cm³ |
| Drive: | Dual Hydrostatic |
| Transmission: | Parker HTG 14 cc |
| Max. speed: | 19,5 km/h (forward)/10 km/h (reverse) |
| Cutting height adjustment: | 17 positions |

Model no.: 53AIHKUY603

Price: -




KAWASAKI FX 1000V EFI
V-TWIN DUAL CYLINDER

Z9 183id

The new Z-Turn Z9 183id is a commercial zero-turn mower with extremely wide double tires – developed to effortlessly tackle even the steepest slopes of up to 25° (46 %). In addition, it has an impressive extremely robust and multi-reinforced steel cutting deck, outstanding mowing performance and air-cushioned seating comfort. This top-of-the-line zero turn is ideal for municipalities, commercial users and owners of large properties with challenging terrain.

Z9 183id

MADE FOR
EVERY SLOPE

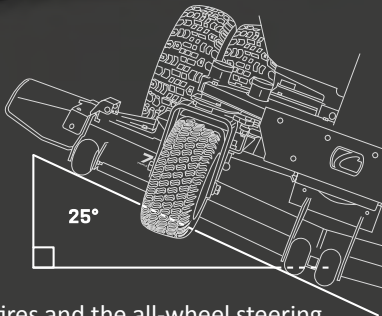

BEST MOWING PERFORMANCE

Thanks to the outstanding technical equipment, straight mowing lines, zero radius turns and mowing on steep slopes are easy.

WORK EFFORTLESSLY AND DRIVE COMFORTABLY

With the comfort features, you can enjoy a relaxed ride all day long. With the exclusive air ride seat, you can adjust the seat firmness according to your personal preferences.

ELECTRONICALLY ADJUSTABLE CUTTING DECK

Adjust the cutting deck to the specific requirements with just the touch of a button.

UNMATCHED CLIMBING ABILITIES

Extremely wide double tires and the all-wheel steering ensure maximum stability and precision even on steep slopes with inclines of up to 25°.

POWER AND ECONOMY COMBINED

Thanks to the electronic direct injection, the robust Kawasaki engine combines maximum performance with comparatively low fuel consumption.

RELIABLE AND SAFE


Cub Cadet gives you a guarantee of 1.000 working hours or 3 years* on the new Z9 183id.

| | |
|----------------------------|--|
| Cutting width: | 183 cm |
| Lawn area (rec.): | 18.000 m²/h |
| Discharge type: | Side discharge |
| Engine: | Kawasaki FX1000V EFI, V-TWIN dual cylinder |
| Engine displacement: | 999 cm³ |
| Drive: | Dual Hydrostatic |
| Transmission: | Parker HTG 16 cc |
| Max. speed: | 19,5 km/h (drive) / 10,0 km/h (reverse) |
| Cutting height adjustment: | 17 positions |

Model no.: 53ALHMUY603

Price: -



| | Z1 137 | Z5 152 |
|-------------------------------------|---|---|
| ENGINE | | |
| Engine type | KOHLER Confidant EFI EZT 745 | Kawasaki OHV |
| Engine displacement | 747 cm³ | 852 cm³ |
| Rated power | 14,4 kW / 2.300 min ⁻¹ | 17,2 kW / 2.500 min ⁻¹ |
| Cylinders | V-TWIN dual cylinder | V-TWIN dual cylinder |
| Tank volume <i>(capacity)</i> | 2 x 15 l | 2 x 34 l |
| Drive | Dual Hydrostatic | Dual Hydrostatic |
| Transmission | Hydrogear ZT3400 | Parker HTG 12 cc |
| Lubrication | Pressure oil lubrication | Pressure oil lubrication |
| CUTTING SYSTEM | | |
| Lawn area <i>(rec./up to)</i> | 13.500 m²/h | 15.000 m²/h |
| Cutting width | 137 cm | 152 cm |
| Cutting height <i>(min–max)</i> | 26–127 mm | 26–127 mm |
| Cutting options | 2-in-1 | 2-in-1 |
| Number of blades | 3 | 3 |
| Deck engagement | Electric PTO | Electric PTO |
| Deck height positions | 17 positions | 17 positions |
| Deck wheels | 4 + 2 Nose | 4 + 2 front roller |
| Mulch Kit | Standard | Standard |
| DISCHARGE SYSTEM | | |
| Ejection type | Side discharge | Side discharge |
| Grass deflector | Standard | Standard |
| FRAME | | |
| Front bumper/rear bumper | – / Standard | – / Standard |
| Turning radius | 0 cm | 0 cm |
| Wheel size <i>(f/r in inch)</i> | 13 x 6,5 / 24 x 12 | 15 x 6 / 24 x 12 |
| Wheel bearings | Ball bearings | Ball bearings |
| ELECTRICAL SYSTEM | | |
| Battery | 230 CCA | 230 CCA |
| Headlights | – | – |
| Hour metre/service minder | Standard | Standard |
| Safety systems | Rollover bar | Rollover bar |
| COMFORT | | |
| Seat type | High back, adjustable | High back with armrests, adjustable |
| Seat adjustment | Quick adjuster lever | Quick adjuster lever |
| Steering wheel | Soft-Grip | Soft-Grip |
| Utility bin | – | – |
| Mow in reverse | Standard | Standard |
| Battery charger | – | – |
| DIMENSIONS | | |
| LpA/LwA/LwAg <i>(dB)</i> | 93/103/105 | 93/103/105 |
| Vibration value body/K-Faktor | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² |
| Vibration value hand/arm / K-Faktor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions <i>(L/W/H)</i> | 180 cm / 145 cm / 130 cm | 230 cm / 160 cm / 134 cm |
| Net weight | 360 kg | 680 kg |
| PRICE | | |
| Model number | 53CWEFJA603 | 53BIHJUV603 |
| EAN |  |  |
| Price | - | - |

| | Z7 183 | Z9 183id |
|-------------------------------------|---|---|
| ENGINE | | |
| Engine type | Kawasaki OHV | Kawasaki FX1000V EFI |
| Engine displacement | 999 cm³ | 999 cm³ |
| Rated power | 21 kW / 2.600 min ⁻¹ | 28 kW / 2.600 min ⁻¹ |
| Cylinders | V-TWIN dual cylinder | V-TWIN dual cylinder |
| Tank volume <i>(capacity)</i> | 2 x 34 l with fuel gauge | 2 x 34 l, with fuel indicator |
| Drive | Dual Hydrostatic | Dual Hydrostatic |
| Transmission | Parker HTG 14 cc | Parker HTG 16 cc |
| Lubrication | Pressure oil lubrication | Pressure oil lubrication |
| CUTTING SYSTEM | | |
| Lawn area <i>(rec./up to)</i> | 18.000 m²/h | 18.000 m²/h |
| Cutting width | 183 cm | 183 cm |
| Cutting height <i>(min–max)</i> | 26–127 mm | 26–127 mm |
| Cutting options | 2-in-1 | 2-in-1 |
| Number of blades | 3 | 3 |
| Deck engagement | Electric PTO | Electric PTO |
| Deck height positions | 17 positions | 17 positions |
| Deck wheels | 4 + 2 Nose + 1 deck rear rollers | 4 + 2 roller |
| Mulch Kit | Standard | Standard |
| DISCHARGE SYSTEM | | |
| Ejection type | Side discharge | Side discharge |
| Grass deflector | Standard | Standard |
| FRAME | | |
| Front bumper/rear bumper | – / Standard | – / Standard |
| Turning radius | 0 cm | 0 cm |
| Wheel size <i>(f/r in inch)</i> | 16 x 6,5 / 24 x 12 | 16 x 6,5 / 24 x 12 |
| Wheel bearings | Ball bearings | n.a. |
| ELECTRICAL SYSTEM | | |
| Battery | 230 CCA | 12 V / 230 CCA |
| Headlights | – | – |
| Hour metre/service minder | Standard | Standard |
| Safety systems | Rollover bar | Rollover bar |
| COMFORT | | |
| Seat type | High back with armrests, adjustable | High back with armrests, individually adjustable |
| Seat adjustment | Quick adjuster lever | Quick adjuster lever |
| Steering wheel | Soft-Grip | Soft-Grip |
| Utility bin | – | Standard |
| Mow in reverse | Standard | Standard |
| Battery charger | – | – |
| DIMENSIONS | | |
| LpA/LwA/LwAg <i>(dB)</i> | 93/103/105 | 93/103/105 |
| Vibration value body/K-Faktor | 1,0 / 0,5 m/s² | 1,0 / 0,5 m/s² |
| Vibration value hand/arm / K-Faktor | 5,0 / 1,5 m/s² | 5,0 / 1,5 m/s² |
| Dimensions <i>(L/W/H)</i> | 226 cm / 185 cm / 131 cm | 226 cm / 185 cm / 131 cm |
| Net weight | 732 kg | 840 kg |
| PRICE | | |
| Model number | 53AIHKUY603 | 53ALHMUY603 |
| EAN |  |  |
| Price | - | - |

PRO SERIES ACCESSORIES

| | | |
|---|--|---|
|  | SNOW CHAINS | |
| | Snow chains for Z1 | <div><div>0 037049 945603</div><div>Mod. no.: 490-241-0026</div><div>Price: -</div></div> |
| | Snow chains for Z5 and Z7 | <div><div>0 037049 951123</div><div>Mod. no.: 490-241-0036</div><div>Price: -</div></div> |
|  | DOZER BLADE | |
| | Dozer blade for Z5 and Z7 | <div><div>0 043033 580255</div><div>Mod. no.: 59B30036150</div><div>Price: -</div></div> |
|  | ELECTRIC DECK LIFT KIT | |
| | Electric deck lift for Z1 | <div><div>4 008423 881189</div><div>Mod. no.: 19B70045100</div><div>Price: -</div></div> |
|  | HEAVY DUTY LAWN STRIPING KIT | |
| | Heavy duty lawn striping Kit for Z1 | <div><div>0 043033 542109</div><div>Mod. no.: 19A70019100</div><div>Price: -</div></div> |
| | Heavy duty lawn striping Kit for Z7 and Z9 | <div><div>0 889021 121587</div><div>Mod. no.: 59A30052150</div><div>Price: -</div></div> |



ACCESSORIES OVERVIEW

| MOD. NO. | DESCRIPTION | EAN CODE | PRICE | | LT1 N | LT1 N | LT2 N | LT2 N | LT3 P | LT3 P | XT1 Q | XT1 Q | XT1 Q | XT1 Q | XT2 P | XT2 Q | XT2 P | XT2 P | XT2 P | XT2 E | XT2 Q | XT3 Q | XT3 Q | XT3 Q |
|---------------------------|--|---------------|-------|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| LAWN TRACTORS ACCESSORIES | | | | | | | | | | | | | | | | | | | | | | | | |
| REAR ACCESSORIES | | | | | | | | | | | | | | | | | | | | | | | | |
| 190-236A000 | Transport trailer with plastic tub, max. 159 kg | 4008423804331 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 196-506-000 | Transport trailer with plastic tub, max. 175 kg | 4008423816396 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 190-223B000 | Steel transport trailer, max. 159 kg | 4016918006894 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 196-507-000 | Steel transport trailer, max. 340 kg | 4008423804348 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 19A30029100 | Rear transport platform for XT Series side discharger system | 0043033577132 | - | | | | | | | | • | | • | | | | | • | • | • | • | | • | • |
| 19A30028100 | Rear-mount electrical spreader for XT Series side discharger system | 4008423875775 | - | | | | | | | | • | | • | | | | | • | • | | • | | • | • |
| 196-031B000 | Trailer spreader, capacity: 39 kg, spreading width 300 cm | 4008423875829 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 196-545-000 | Trailer spreader, capacity: 80 kg, spreading width 365 cm | 4008423874129 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 196-036-000 | Tow broadcast spreader 110 lbs | 4008423816310 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 190-537-000 | Trailer sprayer, spraying rate 6,8 l/min, capacity 95 l | 4008423804430 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 196-543-000 | Towed lawn and leaf sweeper, 112 cm | 4008423858976 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 190-163A000 | Towed lawn and leaf sweeper, 107 cm | 4008423807516 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 196-570-600 | Electr. grass catcher emptying mechanism for XT Series rear discharge | 4008423882025 | - | | | | | | | | • | | • | | • | • | • | | | | | • | | |
| OEM-190-180A | Dual-bag 200 l grass catcher for 96/107 cm LT Series mowing decks | 4008423815849 | - | | | • | | • | | • | | • | | | | | | | | | | | | |
| OEMR190-180A | Dual-bag 200 l grass catcher for 96 cm XT Series mowing decks | 4008423883350 | - | | | | | | | | | • | | | | | | | | | | | | |
| 19A30030100 | Dual-bag 200 l grass catcher for 107/117 cm XT Series mowing decks | 4008423879636 | - | | | | | | | | | | | • | | | | • | • | • | • | | | |
| 19A30018100 | Triple-bag grass catcher, 210 l, for 127/137 cm XT Series mowing decks | 0037049957286 | - | | | | | | | | | | | | | | | | | | | | • | • |
| 196-555-603 | Anti-dust system for XT Series 320 l grass collection system | 4008423875089 | - | | | | | | | | • | | • | | • | • | | | | | | | | |
| 196-553-603 | Anti-dust system for XT Series 360 l grass collection system | 4008423874976 | - | | | | | | | | | | | | | | | | | | | • | | |
| 190-228-000 | Lawn roller, width 61 cm, max. weight 114 kg | 4008423401264 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 190-229-000 | Lawn roller, width 92 cm, max. weight 182 kg | 4008423804478 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 190-526-000 | Lawn rake, 102 cm working width, 20 tines | 4008423804454 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 196-094-000 | Tow-Lawn Aerator, 102 cm working width, 10 galvanised aerator stars | 4008423896367 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 196-552A000 | Deflector for all XT series rear discharge lawntractors | 4008423899641 | - | | | | | | | | • | | • | | • | • | • | | | | | • | | |
| 196-750A678 | Deflector for LT Series rear discharger system | 4008423836097 | - | | • | | • | | • | | | | | | | | | | | | | | | |
| 196-399-000 | Rear hitch for LT series with rear discharge | 4008423914733 | - | | • | | • | | • | | | | | | | | | | | | | | | |
| FRONT ACCESSORIES | | | | | | | | | | | | | | | | | | | | | | | | |
| OEM-190-679 | Front bumpers – for all LT Series lawn tractors | 4008423917819 | - | | • | • | • | • | • | • | | | | | | | | | | | | | | |
| 196-564-000 | Bull bar bumper for XT Series | 4056494171210 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| OEM-190-833 | 117 cm dozer blade for LT Series | 4008423807684 | - | | • | • | • | • | • | • | | | | | | | | | | | | | | |
| 196-584-000 | Installation Kit – for attaching OEM-190-833 in the XT Series | 4008423879629 | - | | | | | | | | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 196-718-678 | Universal rubber lip suitable for all dozer blades | 4008423815368 | - | | • | • | • | • | • | • | | | | | | | | | | | | | | |
| 19A30017OEM | 117 cm dozer blade for XT Series | 0037049957309 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 19A40024100 | Snow thrower for XT Series side discharger | 0043033573585 | - | | | | | | | | | • | | • | | | | • | • | • | • | | • | • |
| 19A40045OEM | Snow thrower for XT Series rear discharger | 0016918038936 | - | | | | | | | | • | | • | | • | • | • | | | | | • | | |
| TIELBÜRGER FOR XT SERIES | | | | | | | | | | | | | | | | | | | | | | | | |
| 196-603-000 | Front attachment sweeper, 120 cm | 4008423883510 | - | | | | | | | | • | • | • | • | • | • | • | • | • | | • | • | • | • |
| 196-604-000 | Hopper for front attachment sweeper | 4008423883527 | - | | | | | | | | • | • | • | • | • | • | • | • | • | | • | • | • | • |
| 196-606-000 | Premium dozer blade, 125 cm | 4008423883534 | - | | | | | | | | • | • | • | • | • | • | • | • | • | | • | • | • | • |
| 196-607-000 | Wheels for Premium dozer blade | 4008423883541 | - | | | | | | | | • | • | • | • | • | • | • | • | • | | • | • | • | • |
| 196-601-000 | Rapid changer without drive – attachment for front premium dozer blade | 4008423883497 | - | | | | | | | | • | • | • | • | • | • | • | • | • | | • | • | • | • |
| 196-602-000 | Rapid changer without drive – attachment for front attachment sweeper | 4008423883503 | - | | | | | | | | • | • | • | • | • | • | • | • | • | | • | • | • | • |
| 196-608-000 | Drive set rear discharge | 4008423885194 | - | | | | | | | | • | | • | | • | • | • | | | | | • | | |
| 196-609-000 | Drive set side discharge | 4008423885200 | - | | | | | | | | | • | | • | | | | • | • | | • | | • | • |
| 196-610-000 | Mounting frame rear discharge | 4008423885217 | - | | | | | | | | • | | • | | • | • | • | | | | | • | | |
| 196-611-000 | Mounting frame side discharge | 4008423885224 | - | | | | | | | | | • | | • | | | | • | • | | • | | • | • |

| MOD. NO. | DESCRIPTION | EAN CODE | PRICE |
|----------|-------------|----------|-------|
|----------|-------------|----------|-------|

LAWN TRACTORS ACCESSORIES

| MULCHING | | | | LT1 NR92 | LT1 NS96 | LT2 NR92 | LT2 NS96 | LT3 PR105 | LT3 PS107 | XT1 OR95 | XT1 OS96 | XT1 OR106 | XT1 OS107 | XT2 PR95 | XT2 QR106 | XT2 PR106 | XT2 PS107 | XT2 PS117 | XT2 ES107 | XT2 QS117 | XT3 QR106 | XT3 QS127 | XT3 QS137 |
|--------------|---|---------------|---|----------|----------|----------|----------|-----------|-----------|----------|----------|-----------|-----------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| OEM-190A116 | Mulch Kit (without blades) | 4008423819632 | - | | | • | | • | | • | | | | | | | | | | | | | |
| 196-749A678 | Mulch Kit (without blades) | 4008423836080 | - | | • | | • | | • | | | | | | | | | | | | | | |
| 196-550-000 | Mulch Kit without blade for 106 cm mowing decks | 4008423875652 | - | | | | | | | | | • | | | • | • | | | | | • | | |
| 196-551-000 | Mulch Kit without blade for 95 cm mowing decks | 4008423875669 | - | | | | | | | • | | | | • | | • | | | | | | | |
| 196-560-000 | Mulching blade for Mulch Kit (196-550-000) | 4008423875683 | - | | | | | | | | | • | | | • | • | | | | | • | | |
| 196-561-000 | Mulching blade for Mulch Kit (196-551-000) | 4008423875690 | - | | | | | | | • | | | | • | | | | | | | | | |
| SNOW CHAINS | | | | | | | | | | | | | | | | | | | | | | | |
| 196-658-699 | Snow chains for 20" x 8,0" tyres with adapter | 4008423824797 | - | | | • | | • | | • | | • | | • | | | | • | • | • | • | | |
| 196-898-699 | Snow chains for 18" x 9,5" tyres with adapter | 4008423813678 | - | | • | | • | | • | | | | | | | | | | | | | | |
| 490-241-0025 | Snow chains for 22" x 9", 5" x 12" and 23" x 9", 5" x 12" | 0037049945597 | - | | | | | | | | | | | | | | | | | | | • | • |

ADDITIONAL ACCESSORIES

| | | | | | | | | | | | | | | | | | | | | | | | |
|--------------|---|---------------|---|--|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|---|---|--|--|
| 196-721A678 | Rear wheels with traction tyres, 18" x 9,5" | 4008423816891 | - | | • | | • | | • | | • | • | • | • | • | • | • | • | | • | | | |
| 196-967-678 | Battery charger for LR, LT and XT Series | 4008423835694 | - | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | | • | • | | |
| 2024-U1-0003 | Tarpaulin for lawn tractors, size L | 4008423806441 | - | | | • | | • | | | | | | | | | | | | | | | |
| 2024-U1-0004 | Tarpaulin for lawn tractors, size XL | 4008423823882 | - | | | | | | | • | • | • | | • | • | • | | | | | | | |

| MOD. NO. | DESCRIPTION | EAN CODE | PRICE |
|----------|-------------|----------|-------|
|----------|-------------|----------|-------|

MINI-RIDER

| | | | | LR1 MS76 | LR1 MR76 | LR2 NS76 | LR2 NR76 | LR2 ES76 |
|-------------|---|---------------|---|----------|----------|----------|----------|----------|
| 196-334-600 | Mulch Kit/deflector with blade for 76 cm decks | 4008423862829 | - | | • | • | • | • |
| 196-707-678 | Mulch Kit/deflector with blade for 60 cm decks | 4008423811797 | - | | | | | |
| 19A30014OEM | Dual-bag 115 l grass catcher without blades for 76 cm decks | 0043033563029 | - | | • | | • | • |
| 196-397-000 | Rear hitch for LR series with side discharge | 4008423914719 | - | | • | • | | • |
| 196-398-000 | Rear hitch for LR series with rear discharge | 4008423914726 | - | | • | | • | |

| MOD. NO. | DESCRIPTION | EAN CODE | PRICE |
|----------|-------------|----------|-------|
|----------|-------------|----------|-------|

LAWN MOWERS

| | | | | LM1 AP46 | LM1 AR46 | LM1 CR53 | LM1 DP53 | LM2 DR46s | LM2 DR46es | LM2 DR53s | LM3 CR46s | LM3 CRC46s | LM3 CR53s | LM3 DR53es | LC3 DP56 |
|--------------|--|---------------|---|----------|----------|----------|----------|-----------|------------|-----------|-----------|------------|-----------|------------|----------|
| 196-588-678 | Mulch Kit for 46 cm mowing decks LM Series | 4008423855913 | - | | • | • | | • | • | | • | • | | | |
| 196-589-678 | Mulchkit for 53 cm mowing decks LM Series, until model year 2020 | 4008423855920 | - | | | | • | • | | • | | | • | • | |
| 196-590-678 | Mulchkit for 53 cm mowing decks LM Series, from model year 2021 onwards | 4008423918748 | - | | | • | • | | | • | | | • | • | |
| 1182-WS-0001 | 10 pcs. of cutting line AF3.20, cut to 3,9 mm x 47 cm length for trimmer | 4056494116662 | - | | | | | | | | | | | | • |

| MOD. NO. | DESCRIPTION | EAN CODE | PRICE |
|----------|-------------|----------|-------|
|----------|-------------|----------|-------|

ROBOTIC MOWERS

| | | | | XR5 1000 | XR5 2000 | XR5 3000 | XR5 4000 |
|-------------|---|---------------|---|----------|----------|----------|----------|
| MRK0067B | Perimeter wire (650 metres on spool) | 7290109391458 | - | | • | • | • |
| 122-003-603 | Installation Kit large (for max. 2.500 m²) 250 m wire, 350 pegs | 4008423885163 | - | | • | • | • |
| 122-002-603 | Installation Kit medium (for max. 1.200 m²), 150 m wire, 200 pegs | 4008423885156 | - | | • | • | • |
| 122-001-603 | Installation Kit small (for max. 400 m²) 100 m wire, 150 pegs | 4008423885149 | - | | • | • | • |
| 122-085-603 | RoboHome for XR5 models | 4008423917895 | - | | • | • | • |
| 122-105-603 | Blade kit XR5 models | 4008423917901 | - | | • | • | • |



| MOD. NO. | DESCRIPTION | EAN CODE | PRICE | | LH5 H60 | LH5 HT60 | LH5 B60 | LH5 C60 | LM5 E 51 R |
|----------------------------|-------------------------|---------------|-------|--|---------|----------|---------|---------|------------|
| 60V MAX AKKU-SYSTEM | | | | | | | | | |
| 49AP601-603 | 60V MAX battery, 2,5 Ah | 4008423917383 | - | | • | • | • | • | |
| 49AP602-603 | 60V MAX battery, 5,0 Ah | 4008423917390 | - | | | | | | • |
| 49AL601-603 | 60V MAX Charger, 2,0 A | 4008423917406 | - | | • | • | • | • | • |

| MOD. NO. | DESCRIPTION | EAN CODE | PRICE | | XS2 61 SWE | XS3 66 SWE | XS3 71 SWE | XS3 76 SWE | XS3 76 TDE |
|---------------------------|--|---------------|-------|--|------------|------------|------------|------------|------------|
| WINTER ACCESSORIES | | | | | | | | | |
| 7011-M6-0010 | Shear bolt for all snow throwers | 4008423821871 | - | | • | • | • | • | • |
| 2024-U1-0005 | Tarpaulin for all snow throwers | 4047427520458 | - | | • | • | • | • | • |
| 6012-X1-0040 | Winter engine oil, contents: 1.000 ml | 4008423821987 | - | | • | • | • | • | • |
| 396-004-678 | Dozer blade for all 2X and 3X Series snow throwers | 4008423811025 | - | | • | • | • | • | • |
| 6012-X1-0045 | Easy Run fuel stabiliser, 250 ml | 4008423852387 | - | | • | • | • | • | • |
| 396-005-678 | Rubber lip – universal for all dozer blades | 400842815837 | - | | • | • | • | • | • |

| MOD. NO. | DESCRIPTION | EAN CODE | PRICE | | XZ3 122 | XZ6 S107 | XZ6 S117 | XZ6 S127 | XZ5 107 | XZ5 127 | XZ5 137 | XZ7 L122 | XZ7 L152i |
|------------------------------|---|---------------|-------|--|---------|----------|----------|----------|---------|---------|---------|----------|-----------|
| ZERO-TURN ACCESSORIES | | | | | | | | | | | | | |
| 19C70020100 | Twin bagger, 200 l, for XZ2 117i | 0037049957835 | - | | | | | | | | | | |
| 19A70043100 | Twin bagger, 200 l, for XZ2 127 | 0043033565085 | - | | | | | | | | | | |
| 19A70040100 | Triple bagger, 300 l, for XZ3 122 | 0043033565054 | - | | • | | | | | | | | |
| 19A70054100 | Cub Cadet RZT Twin Bagger, 107 cm, 230 litres for XZ5 | 4008423913361 | - | | | | | | • | • | • | | |
| 19A70055100 | Cub Cadet RZT Twin Bagger, 127 / 137 cm, 230 litres for XZ5 | 0037049965410 | - | | | | | | • | • | • | | |
| 49A70001100 | Triple Bagger 380 l, for XZ7 with 122cm cutting width | 4008423917987 | - | | | | | | | | | • | • |
| 49A70002100 | Triple Bagger 380 l, for XZ7 with 152cm cutting width | 4008423917994 | - | | | | | | | | | • | • |
| 490-950-C062 | Weight kit for use with the grass catcher of all XZ6 models | 0889021302702 | - | | | • | • | • | | | | | |
| 19A70025100 | Hitch for all XZ models | 0043033565054 | - | | • | • | • | • | • | • | • | • | • |

| MOD. NO. | DESCRIPTION | EAN CODE | PRICE | | Z1 137 | Z5 152 | Z7 183 | Z9 183i |
|--------------------------|--|---------------|-------|--|--------|--------|--------|---------|
| PRO Z ACCESSORIES | | | | | | | | |
| 490-241-0026 | Snow chains for Z1 | 0037049945603 | - | | • | | | |
| 490-241-0036 | Snow chains for Z5 and Z7 | 0037049951123 | - | | | • | • | |
| 59B30036150 | Dozer blade for Z5 and Z7 | 0043033580255 | - | | | • | • | |
| 19B70045100 | Electric deck lift for Z1 | 4008423881189 | - | | • | | | |
| 19A70019100 | Heavy duty lawn striping Kit for Z1 | 0043033542109 | - | | • | | | |
| 59A30052150 | Heavy duty lawn striping Kit for Z7 and Z9 | 0889021121587 | - | | | • | | • |

| MOD. NO. | DESCRIPTION | EAN CODE | PRICE |
|--------------------------------|---------------------------------|---------------|-------|
| INDEPENDENT ACCESSORIES | | | |
| 19B40026100R | Cub Cadet trailers, max. 450 kg | 4008423887013 | - |
| 19A40027OEM | Guide handle for trailer | 0037049959068 | - |
| 19A40030OEM | Equipment holder for trailer | 0037049959082 | - |
| 196-558-603 | Fuel canister, 10 litre | 4008423877540 | - |



Notes